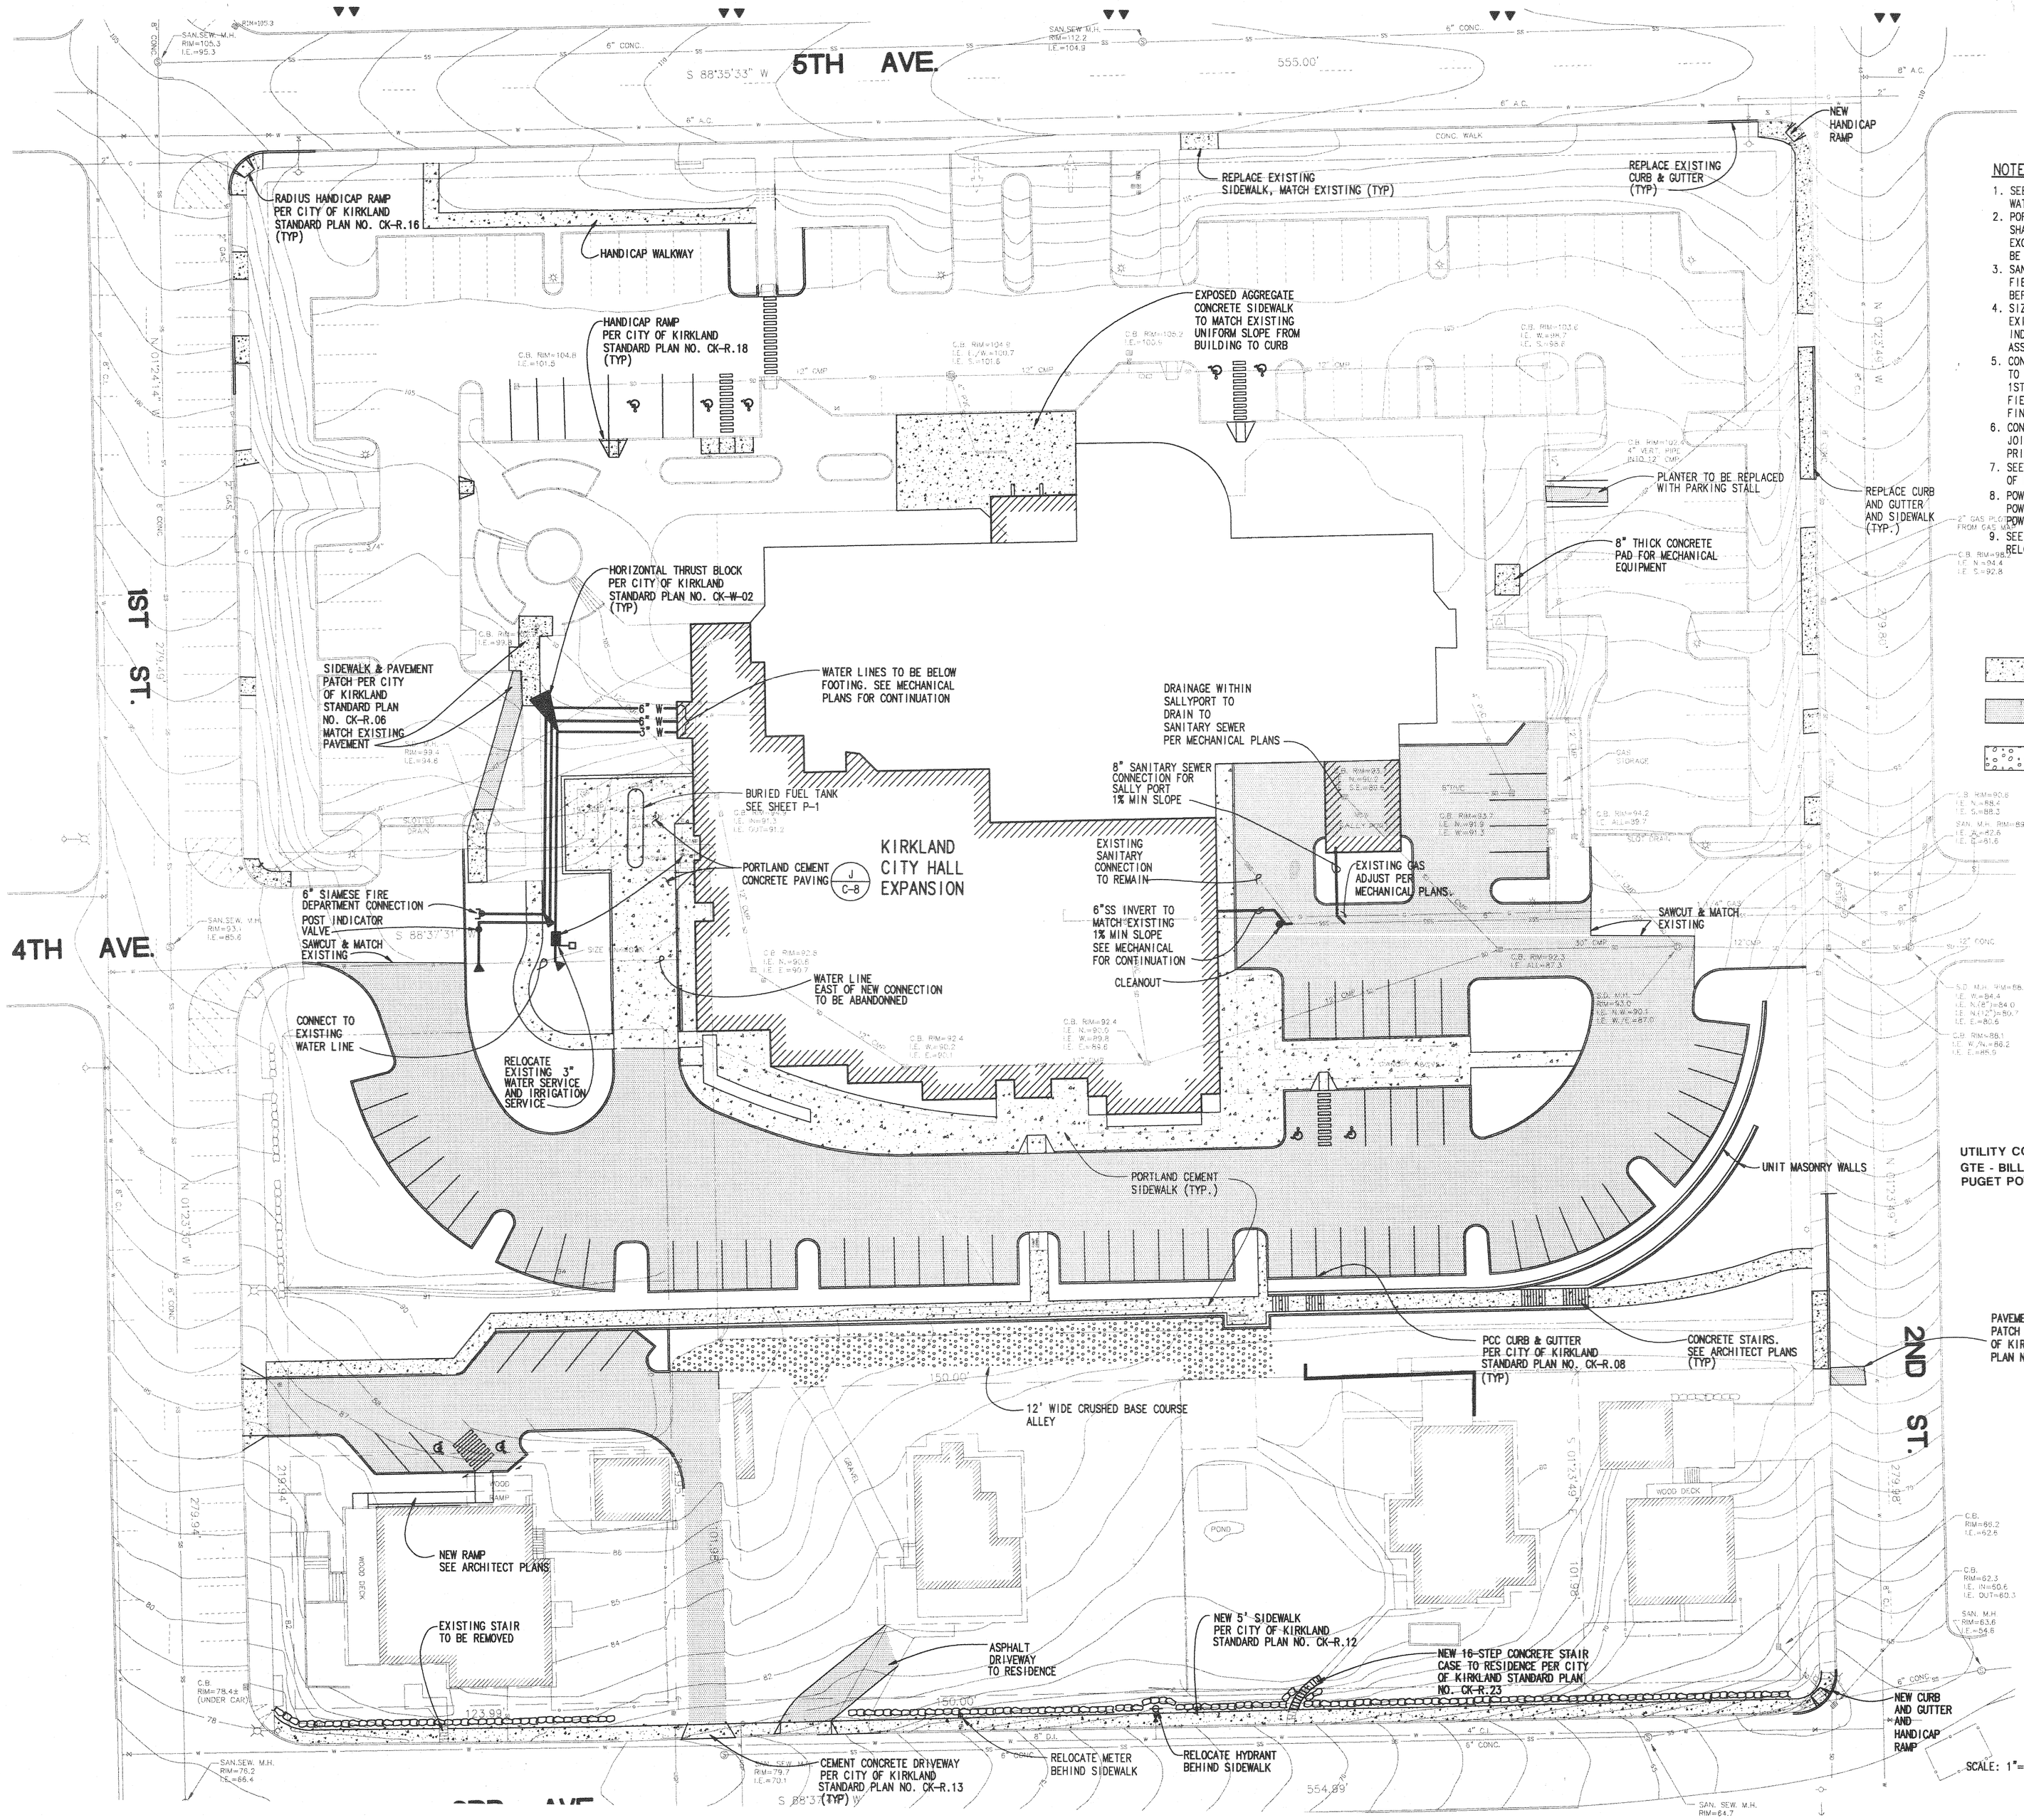

NOTES:

1. SEE SHEET C-5 FOR CITY OF KIRKLAND WATER AND SEWER NOTES.
2. PORTLAND CEMENT CONCRETE(PCC) SIDEWALK SHALL BE 4" PCC OVER 4" BASE COURSE EXCEPT IN DRIVE AREAS WHERE IT SHALL BE 6" PCC OVER 4" BASE COURSE.SEE DETAILS.
3. SANITARY SEWER INVERTS ARE UNKNOWN. FIELD VERIFY AND CONTACT ENGINEER BEFORE CONSTRUCTING NEW SEWER LINES.
4. SIZE OF EXISTING WATER LINE IS UNKNOWN. EXISTING SERVICE TO BE RELOCATED AS INDICATED. DOUBLE CHECK DETECTOR ASSEMBLY TO BE LOCATED WITHIN BUILDING.
5. CONCRETE CURB AND GUTTER AND SIDEWALK TO BE REPLACED ON 5TH AVE, 2ND ST, 1ST ST. AND 3RD AVE AS INDICATED. OWNER TO FIELD LOCATE AREAS TO BE REPLACED BROOM FINISH TO MATCH EXISTING.
6. CONTRACTOR TO SUBMIT CONCRETE PAVEMENT JOINT PATTERN TO ENGINEER FOR APPROVAL PRIOR TO CONSTRUCTION OF LOADING DOCK.
7. SEE ELECTRICAL SITE PLAN FOR LOCATION OF POWER AND TELECOMMUNICATION CONDUIT.
8. POWER POLE RELOCATION ON 3RD AVE BY POWER COMPANY. CONTRACTOR TO COORDINATE POWER AND TELEPHONE RELOCATION.
9. SEE MECHANICAL PLANS FOR GAS LINE RELOCATION.

LEGEND:

- PCC PAVEMENT
- ASPHALT, CL B PAVEMENT (F / C-8)
- 4" CRUSHED BASE COURSE

UTILITY CONTACTS:
GTE - BILL EIKLAND (206) 488-1635
PUGET POWER - GARY TAKEUCHI (206) 822-8212

CALL 48 HOURS BEFORE YOU DIG 1-800-424-5555

Arai/Jackson Architects & Planners
1601 EAST JOHN ST
Seattle WA 98112
TEL 206 323 8800
FAX 206 323 8518

kpff Consulting Engineers
801 Third Avenue, Suite 900
Seattle, Washington 98101
(206) 622-5822 Fax (206) 622-8130
CONTACT: JOE GEIVETT

KIRKLAND CITY HALL EXPANSION AND RENOVATION

MARK A. VELASKO, STATE OF WASHINGTON, 24715, REGISTERED PROFESSIONAL ENGINEER
EXPIRES 9-14-93

Job No	92850.7
Approved by	MAV
Drawn by	JRG
Date	10/20/93
Revision	ISSUED FOR PERMIT 9/22/93
	ISSUED FOR CONSTRUCTION
Description	SITE UTILITY & PAVING PLAN

C-4

FNAME: KCHUTIL PLOT SCALE:1=20 CD:MHV STA:10 DATE:10/16/93 JOB NO:92850.7 PAPER SPACE; NO XREF:KCHTB,KCHARCH