


TYPICAL SECTION FOR VERTICAL CURB

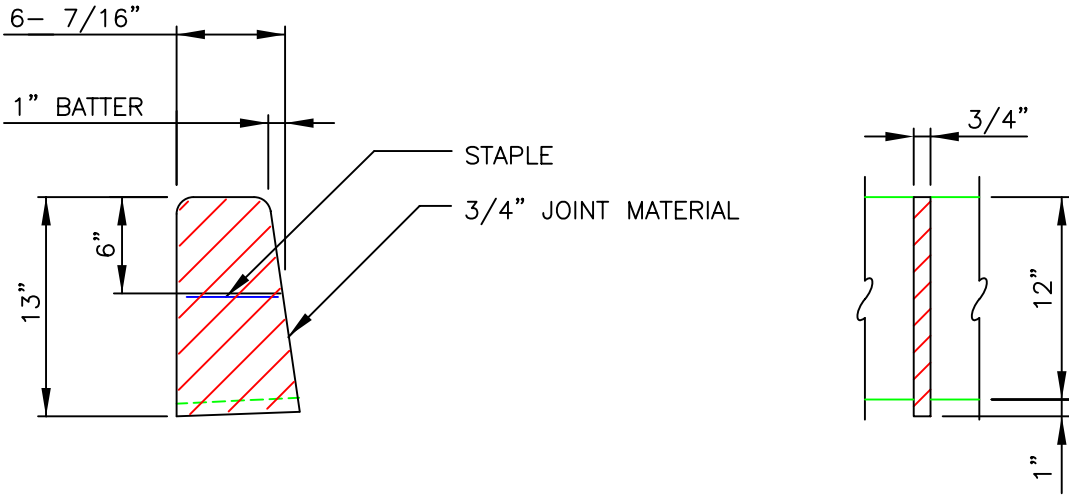

JOINT DETAIL

NOTES

1. FORMS SHALL BE STEEL AND SET TRUE TO LINE AND GRADE (INSPECTION IS REQUIRED PRIOR TO PLACEMENT OF CONCRETE).
2. CONCRETE SHALL BE CEMENT CONCRETE CLASS 4000.
3. BASE COURSE SHALL BE 4" OF 5/8" MINUS CRUSHED ROCK.
4. INSTALLATION OF THIS TYPE OF CURB MUST HAVE PRIOR APPROVAL.

CITY OF KIRKLAND	
PLAN NO. CK-R.17C	
	CONCRETE VERTICAL CURB