



STANDARD 3/8" FULL THICKNESS EXPANSION JOINT (TYPICAL)

LANDING 4' MINIMUM, WHEN LANDING IS LESS THAN 4' USE "WHEELCHAIR CURB RAMP ALTERNATE"

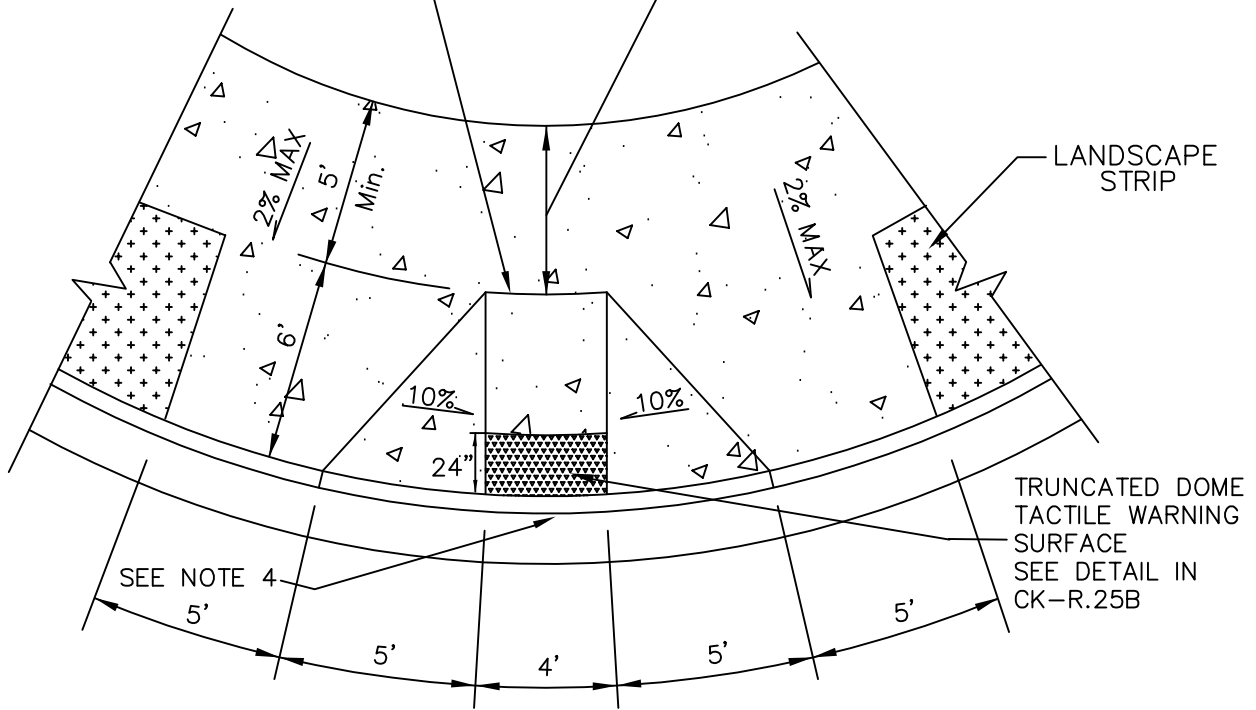


PLAN

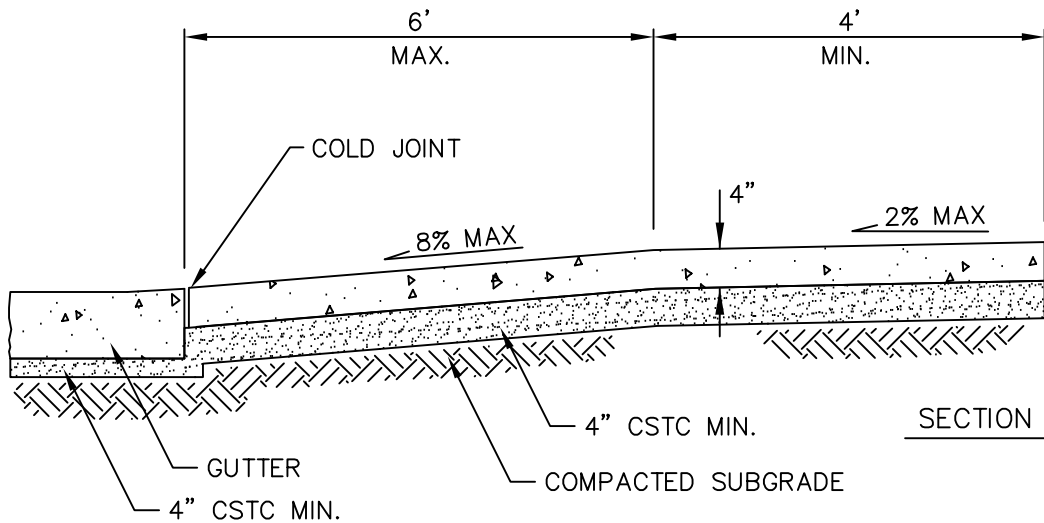

SECTION

NOTES:

1. ALL JOINTS SHALL BE CLEANED AND EDGED.
2. CONCRETE SHALL BE P.C.C. CLASS 4000 PSI MINIMUM, AIR ENTRAINED. NO COLOR OR TINT SHALL BE ADDED.
3. FOR PLACEMENT OF WHEELCHAIR CURB RAMP SEE DRAWING CK-R.24.
4. CURB CUT NOT TO EXCEED 0.25".

CITY OF KIRKLAND	
PLAN NO. CK-R.25	
	<p style="font-size: 1.2em; margin: 0;">WHEEL CHAIR CURB RAMP</p>