


PLAN

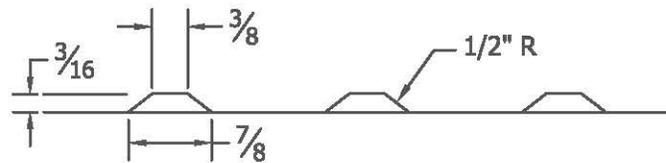

ELEVATION

**NOTE:**

THE DETECTABLE WARNING PATTERN MAY BE FORMED BY ADDING A MANUFACTURED MATERIAL EITHER BEFORE OR AFTER THE CONCRETE HAS CURED. THE TWO-FOOT WIDE DETECTABLE WARNING PATTERN AREA ON THE RAMP SHALL BE YELLOW AND SHALL MATCH THE COLOR OF "STANDARD INTERSTATE YELLOW" PAINT AS SPECIFIED IN FORMULA K-2-83. EMBOSSING THE WET CONCRETE OF INSTALLING MASONRY OF CERAMIC TILES MUST BE APPROVED BY CITY ENGINEER.

CITY OF KIRKLAND	
PLAN NO. CK-R.25B	
	TRUNCATED DOME TEXTILE WARNING SURFACE