


10TH AVENUE

SIGN:
6" X 24" SHEET ALUMINUM 0.080" THICK

BACKGROUND:
GREEN REFLECTIVE SHEETING, OR
BLUE FOR PRIVATE ROADS.
SHEETING SHALL MEET MUTCD
REQUIREMENTS FOR REFLECTIVITY.

LETTERS:
4" UC C SERIES, EXCEPT SUFFIXES
AND PREFIXES 2" UC C SERIES

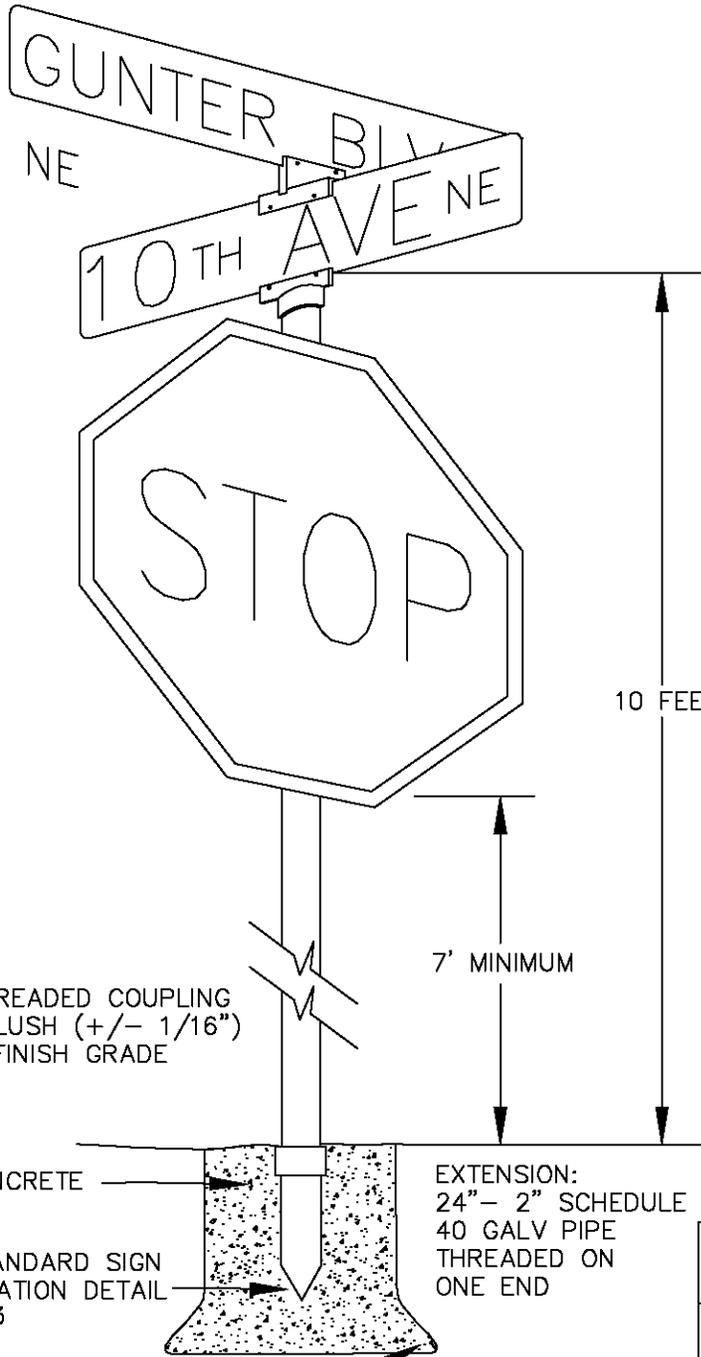

STREET SIGN MOUNTING

HARDWARE:
ZUMAR STYLE 6060 F
OR EQUIVALENT

STOP SIGN MOUNTING

HARDWARE:
HAWKINS U-BRACKET M2G-C2B
OR EQUIVALENT

POST:
10' x 2" SCHEDULE 40
GALVANIZED STEEL PIPE

SIGN:
R1-1 30" X 30"
HIGH INTENSITY GRADE

NOTE:
IF SIGN MUST BE PLACED IN
EXISTING CONCRETE, CORE
HOLE SHALL BE 8" DIAMETER.

CITY OF KIRKLAND

PLAN NO. CK-R.44



STREET NAME
SIGN STANDARD

2" THREADED COUPLING
SET FLUSH (+/- 1/16")
WITH FINISH GRADE

7' MINIMUM

10 FEET

EXTENSION:
24" - 2" SCHEDULE
40 GALV PIPE
THREADED ON
ONE END

SEE STANDARD SIGN
INSTALLATION DETAIL
CK-R.43

FLARE OUT THE BOTTOM
OF HOLE TO ADD
STRENGTH TO POST
ASSEMBLY