

110.52 Sidewalks and Other Public Improvements in Design Districts

1. This section contains regulations that require various sidewalks, pedestrian circulation and pedestrian-oriented improvements on or adjacent to properties located in Design Districts subject to Design Review pursuant to Chapter 142 KZC such as CBD, JBD, TLN, TC, RHBD, ~~and~~ NRHBD ~~and~~ YBD zones.

The applicant must comply with the following development standards in accordance with the location and designation of the abutting right-of-way as a pedestrian-oriented street or major pedestrian sidewalk shown in Plate 34 of Chapter 180 KZC. See also Public Works Pre-Approved Plans manual for public improvements for each Design District. If the required sidewalk improvements cannot be accommodated within the existing right-of-way, the difference may be made up with a public easement over private property; provided, that a minimum of five feet from the curb shall be retained as public right-of-way and may not be in an easement. Buildings may cantilever over such easement areas, flush with the property line in accordance with the International Building Code as adopted in KMC Title 21. (See Figure 110.52.A and Plate 34).

2. Pedestrian-Oriented Street Standards – Unless a different standard is specified in the applicable use zone chart, the applicant shall install a 10-foot-wide sidewalk along the entire frontage of the subject property abutting each pedestrian-oriented street. (See Figure 110.52.A).

Required Sidewalk on Pedestrian-Oriented Streets and Major Pedestrian Sidewalks

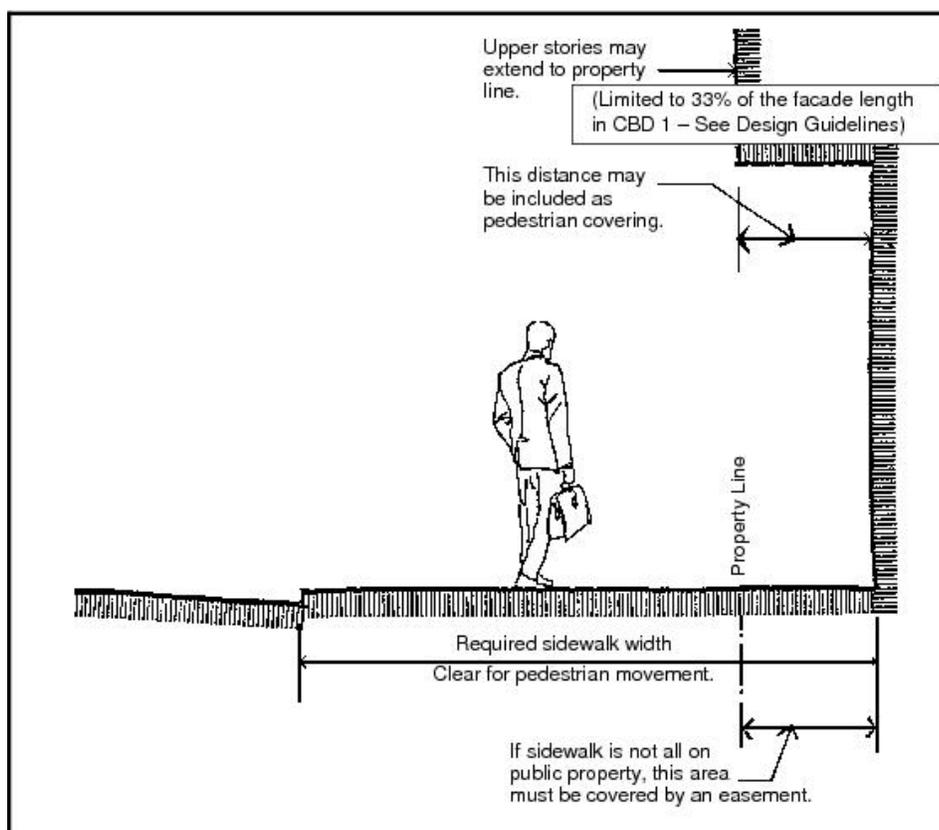


FIGURE 110.52.A

3. Major Pedestrian Sidewalk Standards – If the subject property abuts a street designated to contain a major pedestrian sidewalk in Plate 34, Chapter [180](#) KZC, the applicant shall install that sidewalk on and/or adjacent to the subject property consistent with the following standards:
 - a. Install in the approximate location and make the connections shown in Plate 34;
 - b. A sidewalk width of at least eight feet, unless otherwise noted in Plate 34;
 - c. Have adequate lighting with increased illumination around building entrances and transit stops; and
 - d. If parcels are developed in aggregate, then alternative solutions may be proposed.
4. Streets in the Totem Lake Neighborhood – Streets in the Totem Lake Neighborhood designated as major pedestrian sidewalks in Plate 34.E that are also shown to be within the landscaped boulevard alignment or “Circulator” in Plate 34.D in Chapter [180](#) KZC may have varied or additional requirements, such as wider sidewalks, widened and meandering planting areas, continuous and clustered tree plantings, special lighting, directional signs, benches, varying pavement textures and public art, as determined by the Director of Public Works.
5. NE 85th Street Sidewalk Standards – If the subject property abuts NE 85th Street, the applicant shall install a minimum 6.5-foot-wide landscape strip planted with street trees located adjacent to the curb and a minimum seven-foot-wide sidewalk along the property frontage. Where the public right-of-way lacks adequate width to meet the previous standard, a 10-foot-wide sidewalk with street trees in tree grates may be permitted or in an easement established over private property.