


TYPICAL SECTION FOR CURB & GUTTER, TYPE A

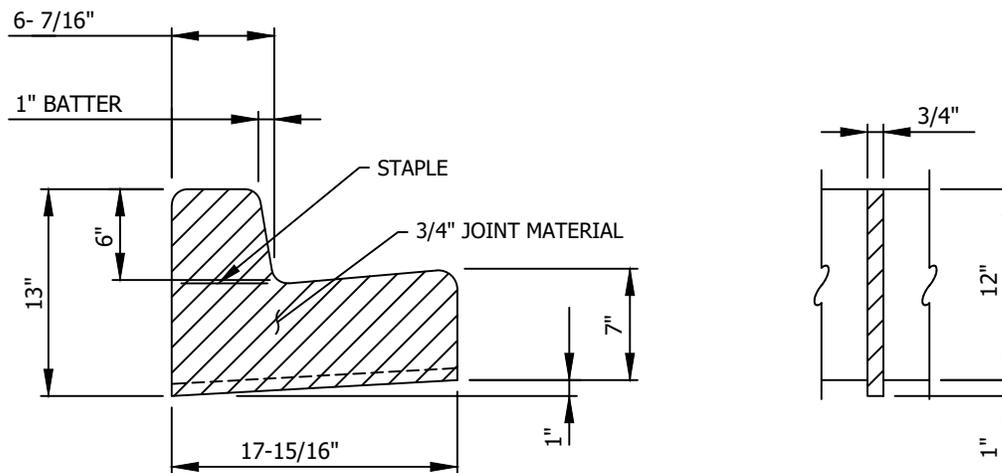

JOINT DETAIL

NOTES:

1. FORMS SHALL BE STEEL AND SET TRUE TO LINE AND GRADE (INSPECTION IS REQUIRED PRIOR TO PLACEMENT OF CONCRETE) UNLESS SPECIFIED DIFFERENTLY BY CITY PROJECT ENGINEER.
2. CONCRETE SHALL BE CEMENT CONCRETE CLASS 4000.
3. BASE COURSE SHALL BE 4" OF 5/8" MINUS CRUSHED ROCK.
4. SURVEY REQUIRED FOR CURB ALIGNMENT.

CITY OF KIRKLAND	
PLAN NO. CK-R.17	
	CONCRETE CURB AND GUTTER, TYPE "A"