



PLAN

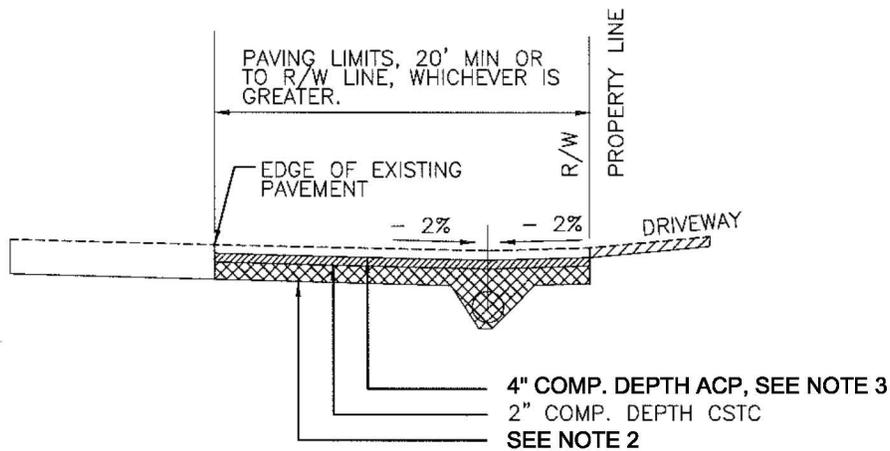

SECTION A-A

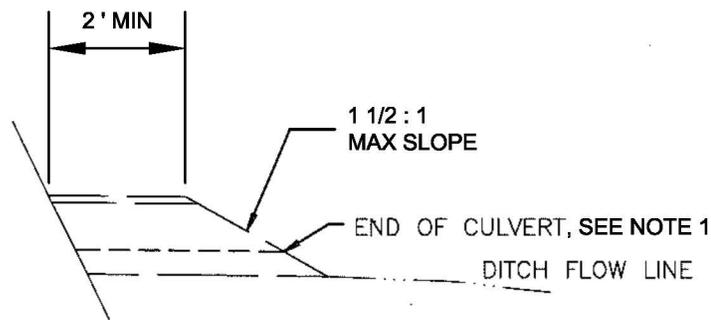

DETAIL

NOTES

1. USE PVC 3034 PIPE. FOR LESS THAN 18 INCHES OF COVER, USE C900 OR DI CLASS 50 OR ABOVE.
2. USE 5/8 INCH CRUSHED ROCK, WITH A MINIMUM OF 0.1 FEET UNDER THE PIPE AND 100% CRUSHED ROCK BACKFILL.
3. ONLY ASPHALT PAVING IS ALLOWED IN THE RIGHT OF WAY.

| | |
|--|--|
| CITY OF KIRKLAND | |
| PLAN NO. CK-D.40 | |
|  | <p style="font-size: 1.2em; margin: 0;">CULVERT UNDER RESIDENTIAL DRIVEWAY</p> |