



PLAN

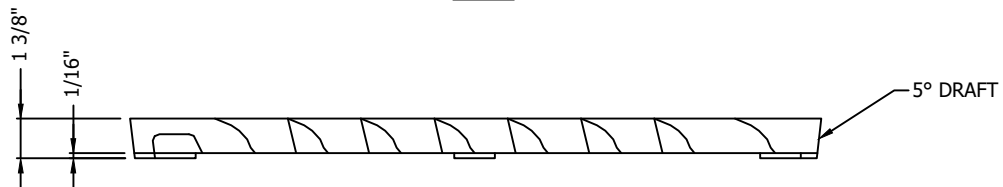

ELEVATION

NOTES:

1. USE EAST JORDAN IRON WORKS OR EQUAL TWO BOLT LOCK CAPABILITY THAT MEETS WSDOT SPEC. MANUFACTURER SUBJECT TO APPROVAL BY CITY.
2. USE WITH TWO LOCKING BOLTS 5/8"-11 NC STAINLESS TYPE 304 STEEL SOCKET HEAD (ALLEN HEAD) BOLTS, 2" LONG.
3. MATERIAL IS DUCTILE IRON ASTM A536 GRADE 80-55-06.
4. "OUTFALL TO STREAM DUMP NO POLLUTANTS" MAY BE LOCATED ON BORDER AREA.
5. SHALL CONFORM TO SEC. 7.05 OF THE STANDARD SPECIFICATIONS.
6. WELDING IS NOT PERMITTED.
7. EDGES SHALL HAVE 0.125" RADIUS, 0.125" CHAMBER OR COMPLETE DEBURRING.
8. USE A BI-DIRECTIONAL VANED GRATE AT ANY LOW POINT OR WHEN FLOWS COME FROM MULTIPLE DIRECTIONS.
9. NO EXPANSION MATERIAL IN THE FLOW LINE, WHERE CONCRETE COMES TO FRAME.
10. FRAME AND COVER SHALL BE H-20 LOADING RATED IF INSTALLED IN ROADWAY.
11. MUST BE MADE IN USA.

<b>CITY OF KIRKLAND</b>	
<b>PLAN NO. CK - D.14</b>	
	<b>VANED GRATE FOR CATCH BASIN AND INLET</b>