



ALIGNMENT OF STRUCTURE TO PIPE FLOWLINE, TYP.

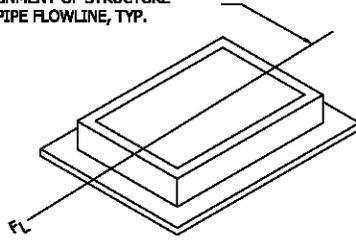


FRAME AND GRATE SEE APPLICABLE STANDARD DETAILS CK-D.11 - D.16.

6" RISER SECTION

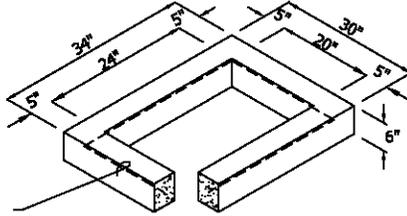

1 #3 BAR HOOP


12" RISER SECTION

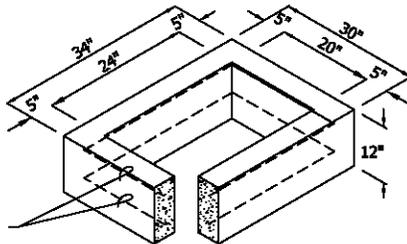

2 #3 BAR HOOPS

**NOTES:**

1. CONCRETE INLET TO BE CONSTRUCTED IN ACCORDANCE WITH ASTM C478 & C890 UNLESS OTHERWISE SHOWN ON PLANS OR NOTED IN THE STANDARD SPECIFICATIONS.
2. AS AN ACCEPTABLE ALTERNATIVE TO REBAR, WELDED WIRE FABRIC HAVING A MIN. AREA OF 0.12 SQUARE INCHES PER FOOT MAY BE USED. WELDED WIRE FABRIC SHALL COMPLY TO ASTM A497. WIRE FABRIC SHALL NO BE PLACED IN KNOCKOUTS.
3. ALL REINFORCED CAST-IN-PLACE CONCRETE SHALL BE CLASS 4000.
4. PRECAST BASES SHALL BE FURNISHED WITH CUTOUTS OR KNOCKOUTS. KNOCKOUTS SHALL HAVE A WALL THICKNESS OF 2" MIN. ALL PIPE SHALL BE INSTALLED IN FACTORY PROVIDED KNOCKOUTS. UNUSED KNOCKOUTS NEED NOT BE GROUTED IF WALL IS LEFT INTACT.
5. KNOCKOUT OR CUTOUT HOLE SIZE IS EQUAL TO PIPE OUTER DIAM. PLUS CURB INLET WALL THICKNESS.
6. ROUND KNOCKOUTS MAY BE ON ALL 4 SIDES WITH MAX. DIAM. OF 16".
7. THE MAX. DEPTH FROM THE FINISHED GRADE TO THE PIPE INVERT IS 5'-0".
8. THE TAPER ON THE SIDES OF THE PRECAST BASE SECTION AND RISER SECTION SHALL NOT EXCEED 1/2"/FT.
9. CONCRETE INLET FRAME AND GRATES SHALL BE IN ACCORDANCE WITH STANDARD SPECIFICATIONS. MATING SURFACES SHALL BE FINISHED TO ASSURE NON-ROCKING FIT WITH ANY COVER POSITION.
10. FRAME AND GRATE SHALL BE INSTALLED WITH FLANGE DOWN.
11. APPROVAL BY THE CITY OF KIRKLAND REQUIRED.
12. CURB INLET MUST DRAIN TO CATCH BASIN WITH SUMP.

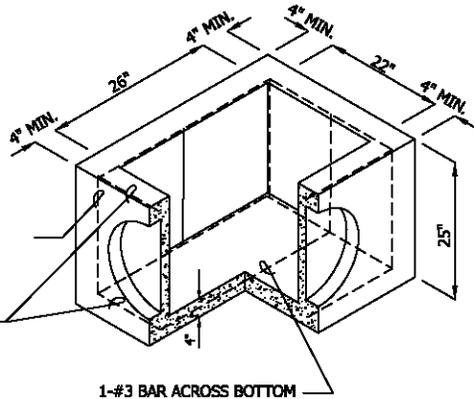

#3 BAR EACH CORNER

#3 BAR EACH SIDE TOP & BOTTOM

1-#3 BAR ACROSS BOTTOM

PRECAST BASE SECTION (MEASUREMENT AT THE TOP OF THE BASE)

**CITY OF KIRKLAND**

PLAN NO. CK-D.06



**CURB INLET**