


ROCK-LINED SHOULDER DITCH  
IN FILL SECTION

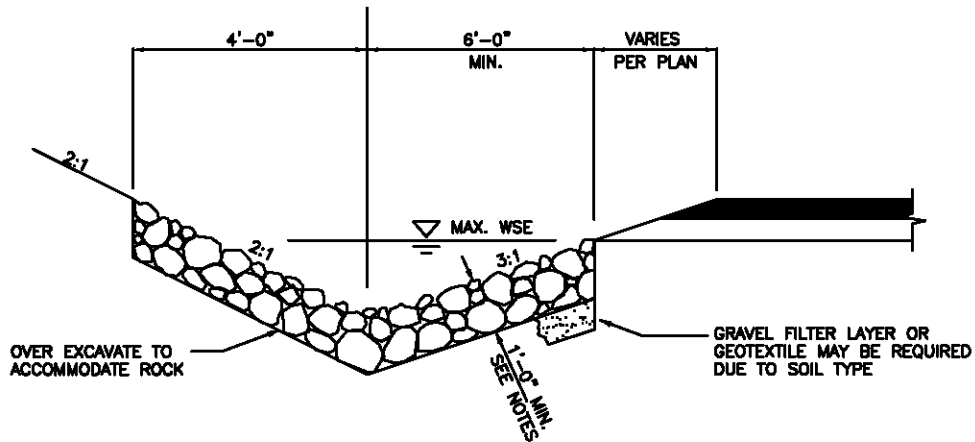

ROCK-LINED SHOULDER DITCH  
IN CUT SECTION

**NOTES:**

1. ROCK LINED DITCHES TO BE USED WHEN FLOW VELOCITIES EXCEED 4 FPS.
2. ROCK SIZE AND DEPTH DEPENDENT ON FLOW VELOCITY. MINIMUM ROCK SIZE 2"-4" QUARRY SPALLS.

CITY OF KIRKLAND

PLAN NO. CK-D.24



ROCK-LINED  
SHOULDER DITCHES