

NATIVE BACKFILL COMPACTED
TO DENSITY OF ADJACENT
SOIL, SEE SPECS


SOIL-CEMENT MIX
PLACED AS DIRECTED
BY ENGINEER

GRAVITY OR PRESSURE PIPE

12" MIN.

12" MIN.

SECTION A-A

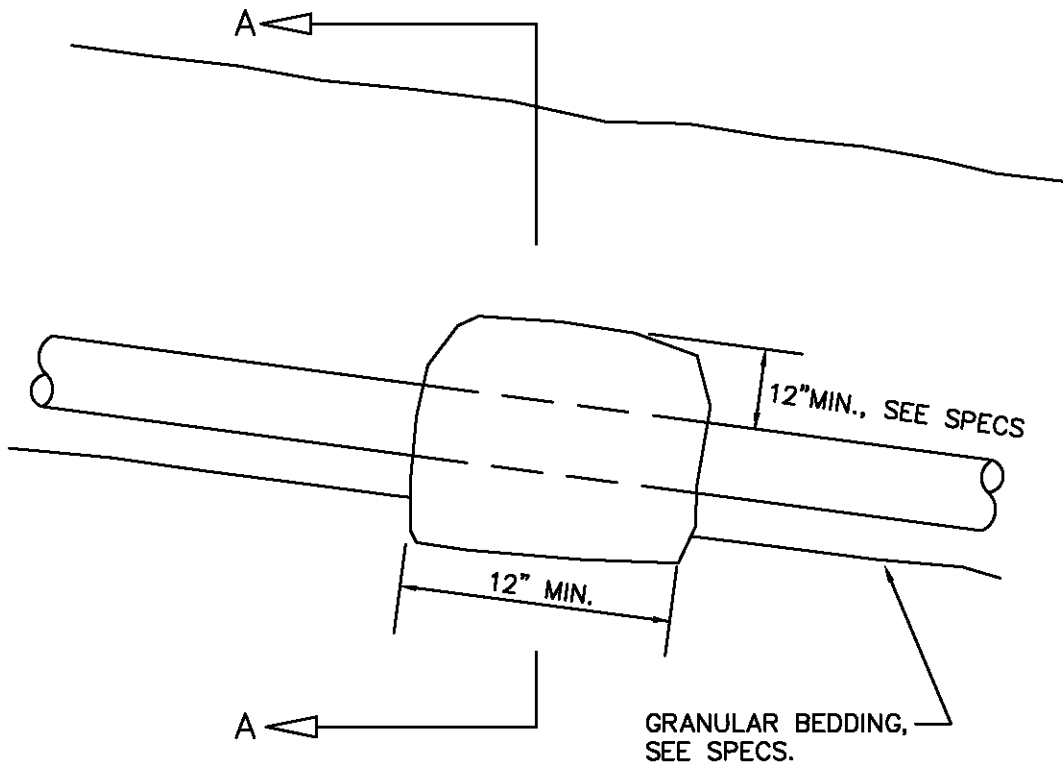

NOTE:

1. SOIL CEMENT BLOCKS PLACED OVER AND AROUND PIPE. TAMPED INTO PLACE BEFORE PLACING BACKFILL. USE 10% CEMENT WITH 90% NATIVE SOIL AND WATER TO SUIT TO FORM A DRY MIX THAT WILL HOLD ITS SHAPE WHEN MOLDED INTO A BALL. SOIL CEMENT BLOCKS REQUIRED ON SLOPES 20% OR GREATER.

CITY OF KIRKLAND

PLAN NO. CK-S.04



SOIL/CEMENT
PIPE ANCHOR