

**CITY OF KIRKLAND**  
**GOAT HILL DRAINAGE DITCH CONVEYANCE AND CHANNEL STABILIZATION, PHASE 1**  
**CIP No. SDC0900000      Job No. 19-23-PW**

**ADDENDUM No. 1**  
**to the Plans, Specifications, Proposal and Contract**

**Issued This Date:** Friday, January 26, 2024

**Bid Opening Date:** **Wednesday, January 31, 2024 (unchanged)**

**Place of Bid Opening:** City Hall, Council Chambers

**Notice to All Plan Holders:**

This Addendum No. 1, containing the revision, addition, deletion, and/or clarification items described herein, is hereby made part of the Plans, Specifications, Proposal and Contract (Contract Documents) for the above-named project. Bidders shall consider the provisions of this Addendum when preparing and submitting their bids and it shall be attached to the Contract Documents.

**Contractors shall acknowledge receipt of this Addendum in the place provided on page 7 of the Bid Proposal. Failure to do so may disqualify the Bidder from consideration of its bid.**

All other requirements of the Contract Documents remain in effect.

---

**Item 1:**

Location: Bid Proposal, Bid Schedule

Description: Lump Sum quantity for bid item A36, *Erosion Control and Water Pollution Prevention* in Schedule A has been corrected (~~2~~ changed to 1) and a new lump sum bid item B10, *General Restoration* has been added to Schedule B. A revised Bid Schedule reflecting and highlighting these changes is attached to this Addenda and shall replace all previous versions.

**Item 2:**

Location: Appendix C

Description: Section 4, *Measurement and Payment* of the Northshore Utility District Engineering Specifications and Special Provisions shall be appended to include the following item description as also shown on the attached replacement page MP10:


**General Restoration**

The lump sum price bid for General Restoration shall constitute full compensation for all labor, material, tools and equipment necessary and incidental to restore disturbed ground surfaces and existing improvements to their pre-construction condition or better, not including work covered by other bid items. This item shall include, but not be limited to, the following:

1. Furnishing and placing of new topsoil, sod, bark, decorative rock or other surface treatment consistent with the adjacent undisturbed ground surface.
2. Excavation, grading and preparation of the areas to be restored.
3. Removal, storage and replacement of any existing decorative shrubs, hedges or trees.
4. Restoration of fences, rockeries, utilities or other structures.
5. Protection or replacement of existing culverts and asphalt lined ditches.
6. Protection of existing trees and improvements not to be removed.
7. Hydroseeding, seeding, mulching, plantings or other erosion control measures as required in rights-of-way, easement, or landscaped areas.
8. Asphalt or concrete pavement required beyond the limits allowed for payment described herein.
9. Removal and replacement of existing landscaping or irrigation system as required.

Payment shall be based on completion of the restoration satisfactory to the individual property owners or agency having jurisdiction over the affected property.

Sincerely,

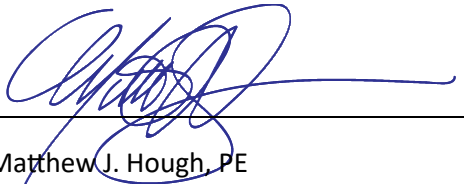

Matthew J. Hough, PE  
Project Engineer  
CPH Consultants



Rod Steitzer, PE  
Capital Projects Manager  
City of Kirkland

Attachments: Bid Schedule (Bid Proposal replacement pages 8 – 10)  
Appendix C - Section 4, *Measurement and Payment* page 10 (replacement page MP10)

# CITY OF KIRKLAND

## BID SCHEDULE

### Goat Hill Drainage Ditch Conveyance and Channel Stabilization, Phase 1 CIP No. SDC0900000, Project No. 19-23-PW

Note: Unit prices for all items, all extensions, and the total amount of the bid must be shown. All entries must be typed or entered in ink.

Item No.	Spec. Section	ITEM	QTY.	UNIT	UNIT PRICE	EXTENDED
Schedule A - Storm Drainage, Roadway, Site						
A1	1-04.4(1)	Minor Change	15,000	CALC		
A2	SP 1-05.4	Roadway Surveying	1	LS		
A3	SP 1-05.18	Record Drawings (Minimum Bid \$1,000)	1	LS		
A4	1-07.15	SPCC Plan	1	LS		
A5	1-09.7	Mobilization	1	LS		
A6	SP 1-10	Project Temporary Traffic Control	1	LS		
A7	SP 2-01	Clearing and Grubbing	1	LS		
A8	SP 2-02	Removing Cement Concrete Sidewalk/Pavement	3	SY		
A9	SP 2-02	Removing Cement Conc. Curb and Gutter	28	LF		
A10	SP 2-02	Remove Existing Catch Basin	21	EA		
A11	SP 2-02	Remove Existing Storm Sewer Pipe	1,202	LF		
A12	2-03	Roadway Excavation Incl. Haul	931	CY		
A13	2-03	Unsuitable Foundation Excavation Incl. Haul	836	CY		
A14	2-03	Gravel Borrow Incl. haul	836	CY		
A15	2-09	Structure Excavation Class A Incl. Haul	127	CY		
A16	2-09	Structure Excavation Class B Incl. Haul	1,196	CY		
A17	5-06	Concrete Paver Removal and Reinstallation	169	SF		
A18	4-04	Crushed Surfacing Base Course	970	TON		
A19	4-04	Crushed Surfacing Top Course	405	TON		
A20	SP 4-06	Asphalt Treated Base, PG64-22	1,455	TON		

Item No.	Spec. Section	ITEM	QTY.	UNIT	UNIT PRICE	EXTENDED
<b>Schedule A - Storm Drainage, Roadway, Site</b>						
A21	SP 5-04	HMA Cl. 1/2 in. PG 58H-22	876	TON		
A22	SP 5-04	Asphalt Cost Price Adjustment	8,500	CALC		
A23	SP 6-12	Modular Block Retaining Wall	520	SF		
A24	8-24	Gravity Block Wall	1,710	SF		
A25	SP 8-24	Rockery Wall	730	SF		
A26	7-01	PVC Drain Pipe 12 In. Diam.	2,430	LF		
A27	7-04	C900 PVC Storm Sewer Pipe 12 In. Diam.	166	LF		
A28	7-04	Testing Storm Sewer Pipe	2,596	LF		
A29	7-04	Abandon Existing Storm Main	59	LF		
A30	SP 7-04	Connect Existing Storm Drain	9	EA		
A31	7-05	Catch Basin Type 1	49	EA		
A32	7-05	Catch Basin Type 1 w/ Circular Locking Lid	3	EA		
A33	7-05	Connect Existing Drainage Structure	8	EA		
A34	SP 7-05	Adjust Catch Basin to Grade	14	EA		
A35	7-08.3(4)	Plugging Existing Pipe	2	EA		
A36	8-01	Erosion Control and Water Pollution Prevention	1	LS		
A37	8-01	Inlet Protection	75	EA		
A38	SP 8-02	Property Restoration	20,000	FA		
A39	8-04	Cement Conc. Traffic Curb and Gutter	65	LF		
A40	SP 8-14	Cement Conc. Sidewalk	183	SY		
A41	8-12	Chain Link Fence, Black Vinyl Coated	201	LF		
<b>Subtotal - Schedule A</b>						
<b>Tax per 1-07.2(2), WAC 458-20-170:</b>					<b>10.2%</b>	
<b>Total - Schedule A</b>						

Item No.	Spec. Section	ITEM	QTY.	UNIT	UNIT PRICE	EXTENDED
<b>Schedule B – Water, Sanitary Sewer Improvements</b>						
B1	1-04.4(1)	Minor Change	12,000	CALC		
B2	SP 1-05.18	Record Drawings (Minimum Bid \$1,000)	1	LS		
B3	NUD Sec. 4	2" Air & Vacuum Relief Valve	1	EA		
B4	NUD Sec. 4	1" Water Service and Reconnection	36	EA		
B5	NUD Sec. 4	1" Private PRV	17	EA		
B6	NUD Sec. 4	Remove and Replace Valve Box	15	EA		
B7	NUD Sec. 4	Remove and Replace Manhole Frame and Cover	10	EA		
B8	NUD Sec. 4	Additional Potholing, if Required	5	EA		
B9	NUD Sec. 4	Trench Safety System	1	LS		
B10	NUD Sec. 4	General Restoration	1	LS		
<b>Subtotal – Schedule B</b>						
<b>Tax per 1-07.2(2), WAC 458-20-170:</b>					<b>10.2%</b>	
<b>Total - Schedule B</b>						

<b>Subtotal - All Schedules</b>						
<b>Tax per 1-07.2(2), WAC 458-20-170:</b>					<b>10.2%</b>	
<b>Total - All Schedules</b>						



### **Additional Potholing, If Required**

Potholing is incidental to all other bid items. However, when located utilities are not found within the standard locating limits (2' on either side of the locate mark) or there are other utilities located that are not shown on the contract plans, the additional potholing shall be paid for under this bid item. The unit price bid for each Additional Potholing, If Required, shall constitute full compensation for all labor, materials, tools and equipment necessary and incidental to pothole and record depths of the underground existing utilities in these circumstances, and the subsequent furnishing, handling, hauling, placing and mechanical compaction of foundation gravel, trench backfill and all other crushed rock or gravel material, native or imported.

### **General Restoration**

The lump sum price bid for General Restoration shall constitute full compensation for all labor, material, tools and equipment necessary and incidental to restore disturbed ground surfaces and existing improvements to their pre-construction condition or better, not including work covered by other bid items. This item shall include, but not be limited to, the following:

1. Furnishing and placing of new topsoil, sod, bark, decorative rock or other surface treatment consistent with the adjacent undisturbed ground surface.
2. Excavation, grading and preparation of the areas to be restored.
3. Removal, storage and replacement of any existing decorative shrubs, hedges or trees.
4. Restoration of fences, rockeries, utilities or other structures.
5. Protection or replacement of existing culverts and asphalt lined ditches.
6. Protection of existing trees and improvements not to be removed.
7. Hydroseeding, seeding, mulching, plantings or other erosion control measures as required in rights-of-way, easement, or landscaped areas.
8. Asphalt or concrete pavement required beyond the limits allowed for payment described herein.
9. Removal and replacement of existing landscaping or irrigation system as required.

Payment shall be based on completion of the restoration satisfactory to the individual property owners or agency having jurisdiction over the affected property.