CERTIFICATE CONCERNING DESIGN AND CONSTRUCTION OF ELECTRONIC SPEED MEASURING DEVICES

I, Nathan Dumler, do certify under penalty of the laws of the State of Washington that the following is true and correct:

I have been employed as a technician by American Traffic Solutions for 2 years. I became a speed validation technician in 2018 and have over 1000 hours performing speed validation tests. I am nationally certified as a RADAR and LIDAR operator. The City of Kirkland currently uses the AutoPatrolTM 3D radar fixed speed safety camera system, an electronic speed measuring device provided through a contract with American Traffic Solutions, Inc. ("ATS"). Part of my duties include monitoring regular testing of the AutoPatrol 3D radar fixed speed safety camera systems used by the City of Kirkland.


ATS contracted with the City of Kirkland to provide an Automated Speed Enforcement ("ASE") system designed to record the speed of a vehicle and obtain photographs or other recorded images of the vehicle and the vehicle's registration plate while the vehicle is traveling in excess of speed limits in certain safety zones within posted limits.

The ASE program includes the use of the AutoPatrol 3D radar fixed speed safety camera systems at the following locations within the City of Kirkland:


Location Location Description Code		Lanes Monitored
KRKF001	NB 132 nd Ave NE @ Muir Elementary/Kamiakin Middle	1
KRKF002	SB 132 nd Ave NE @ Muir Elementary/Kamiakin Middle	1
KRKF003	EB 80 th St @ Rose Hill Elementary	1
KRKF004	WB 80 th St @ Rose Hill Elementary	1

The AutoPatrol 3D radar fixed speed safety camera system operates by measuring vehicle speed, as well as position relative to the radar to calculate and differentiate multiple vehicles in the radar beam. The speed of a moving vehicle is measured by Doppler radar. Doppler radar is a generally accepted technology used for measuring speed. The AutoPatrol 3D radar technology is used throughout the US and Europe as well as other countries and is approved by the Swiss national metrology institute- METAS.

The AutoPatrol 3D radar fixed speed safety camera system uses a tracking radar sensor for measuring vehicle speeds and detecting speed violations. The AutoPatrol 3D radar is aligned at a fixed angle across the road. The AutoPatrol 3D radar emits a horizontal beam over the road surface as represented by the illustration below. The tracking radar can simultaneously detect multiple vehicles and measure their speed, distance, angle and movement within the radar beam. The radar tracks multiple vehicles by reconstructing vehicle movement from the measured object speed, angle and distance values. If a vehicle passes a defined trigger line, the radar outputs the vehicle's speed and lane information. The camera connected to the tracking radar uses this information to determine if there is a speed violation and to capture photographs showing the measured speed and lane on the databar of the captured images.



The tracking radar utilizes the Doppler Effect for speed determination. If an electromagnetic wave is emitted at a moving object, then the wave is reflected back from the moving object. The frequency of the wave received back by the radar shifts based on the speed of the moving object and its direction of travel. The tracking radar continuously determines this frequency shift of each object to calculate the object's speed. The tracking radar consists of two receiving antennas integrated into a single radar sensor. This configuration allows the radar to measure the distance and angle of the vehicle relative to the position of the radar sensor. Illustration A and B show the measurement principle in simplified form. The radar sensor emits a radar beam (illustration A). The radar beam is reflected by the vehicle (illustration B). The two receivers receive the reflected radar beam. The radar sensor evaluates the return frequency, as well as the phase difference of the reflected radar beam from both of the receivers. With the aid of these values the radar sensor calculates the vehicle position.

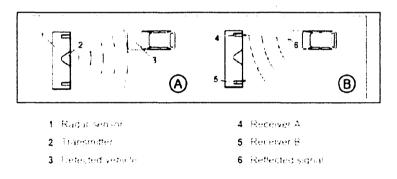

Prior to operation each day, the system performs a system self-test. This self-test performs an electronic tuning fork test to produce a specific frequency and returns an associated speed value. Only if the return value meets the acceptance criteria to show that the system is operating correctly will the system enter measure mode. Unless a self-test is successful, the system will not enter measure mode and no violations will be captured. Additional information stored as metadata within each image includes coordinates of the vehicle position at the time of capture. This information is extracted and utilized through a secondary speed verification process to provide yet another means to validate offender speed and position based on the two images obtained and image analytics. In addition to the internal system checks and the manufacturer calibration certification, the 3D radar system is subject to routine and independent calibration check of the speeds produced by the system at least annually by a qualified technician.

Each day the computer which controls the fixed speed safety camera system is rebooted. The reboot is initiated each day and each time the computer is rebooted an internal check is performed on all operations of each fixed speed safety camera system, including the clocks, sensors, camera and speed calculating hardware and software, in order to verify that all operations are functioning correctly. When the internal check detects a problem with one of the operations on a given fixed speed safety camera system, then that particular fixed

speed safety camera system is inactivated and a request for service is relayed to ATS support personnel. This means that violations cannot be issued until any internal problem is fixed.

Speed validation tests are regularly performed on each installed and operable AutoPatrol 3D radar fixed speed safety camera system. The test is conducted by having a LIDAR Operator obtain true measurements of up to five vehicles per lane in the ascending and/or descending direction. The speed of the vehicle is captured by the LIDAR Operator and then relayed via cellular to an ATS Technician. The ATS Technician then compares the vehicle speed measured by the AutoPatrol 3D radar fixed speed safety camera system to the speed measured by the LIDAR Operator to ensure the accuracy of the AutoPatrol 3D radar fixed speed safety camera system. ATS maintains the results of each test in a Validation Report. The speed validation for each system was performed on the following date and the systems at each location were found to be in proper working order:

Location Location Description Code		Date of Test
KRKF001	NB 132 nd Ave NE @ Muir Elementary/Kamiakin Middle	4/26/2021
KRKF002	SB 132 nd Ave NE @ Muir Elementary/Kamiakin Middle	4/26/2021
KRKF003	EB 80 th St @ Rose Hill Elementary	4/26/2021
KRKF004	WB 80 th St @ Rose Hill Elementary	4/26/2021

Preventative maintenance, including visual inspections, is regularly performed on the AutoPatrol 3D radar fixed speed safety camera systems. Preventative maintenance activities include: cleaning of the cameras and housing, general site inspection of environment and road conditions, inspection of poles, bases and enclosures, and inspection of system cables and connections. The location and date that preventative maintenance is performed is recorded in the Preventative Maintenance Log, which along with the Validation Report(s) referenced above, is attached hereto.

I am a custodian, or otherwise qualified witness, as to the attached records. I make this declaration based on personal knowledge, and if called and sworn as a witness, I could and would testify as set forth in the following paragraph.

Attached as Exhibits are: Exhibit A - Speed Validation Reports, Exhibit B - Preventative Maintenance Logs, and Exhibit C - Annual System Verification Certificate for all AutoPatrol 3D radar fixed speed safety camera systems installed and used by the City of Kirkland. All documents and materials included as Exhibit A, Exhibit B and Exhibit C are authentic and are what they purport to be, and accurately describe the matters set forth therein. All such records are business records in that they are: (1) records kept in the ordinary course of business; (2) created at or near the time of the transactions or events reflected therein by, or based on information from, a person with knowledge of the transaction or events; and (3) kept as part of a regular business activity.

Based upon my education, training, experience, and knowledge of the AutoPatrol 3D radar fixed speed safety camera system, it is my opinion that the system is so designed and constructed as to accurately employ measurement techniques based on a division of distance over time in such a manner that it will give accurate measurements of the speed of motor vehicles.

I, Nathan Dumler, certify (or declare) under penalty of perjury under the laws of the State of Washington that the foregoing is true and correct.

Dated this 20th day of May . 2021 in Mesa, AZ

nothon Dumlen

Nathan Dumler, Speed Validation Technician



Speed Validation Report Client: Kirkland, WA

Validation Date April 26, 2021

- KRKF001 NB 132nd Ave NE @ Muir Elementary/Kamiakin Middle
 - o Radar Serial Number: 590-112/61344
- KRKF002 SB 132nd Ave NE @ Muir Elementary/Kamiakin Middle
 - o Radar Serial Number: 590-112/65874
- KRKF003 EB 80th St @ Rose Hill Elementary
 - o Radar Serial Number: 590-112/61399
- KRKF004 WB 80th St @ Rose Hill Elementary
 - o Radar Serial Number: 590-112/60129

Equipment:

Pro-Lite Plus Hand held Lidar Serial Number: LP03606 Certification Date: February 3, 2021 Lidar Operator: Charles Goodrich RLC Operator: Nathan Dumler

A speed validation test was conducted for the sites listed above. The Lidar Operator, obtained true measurements of five vehicles per lane in the ascending and/or descending direction. Those speeds were obtained using a Kustom Signals Pro-Lite+ hand held Lidar instrument. The speed of the vehicle is captured by the Lidar Operator and then relayed via cellular to the RLC Technician. The RLC Technician is monitoring the vehicle speed at the Fixed Speed Camera system simultaneously to ensure the accuracy of the system. The speed validation tests performed on the above-listed dates confirmed the accuracy of the Fixed Speed Camera systems at each location.

I, Nathan Dumler, certify that the information contained in this report is true and accurate.

hon Sumler

Date: May 20th, 2021 Mesa, Arizona American Traffic Solutions Speed Integrity Team

MAY 2 4 2021 KIRKLAND MUNICIPAL COURT

FILED



Certificate of Achievement
Speed Integrity Technician Has successfully completed the 16 hour course for Speed Integrity Technician This course encompasses all the necessary tasks required to perform the duties as a Speed Integrity Technician. Through this course each participant is required to display the proper competency through
written and practical examinations. In addition, this course certifies each participants as a Lidar operator.
This Day: March 29, 2016 American Traffic Solutions Bolay Institute Giola
Certificate of Achievement
Speed Integrity Technician Has successfully completed the course for Speed Inegrity Technician
This course encompasses all the necessary tasks required to perform the duties as a Speed Integrity Technician. Through this course each participant is required to display the proper competencies in Radar and Laser Technology. In addition, this course certifies each participants as a Lidar operator.
Presented to: Nathan Dumler
This Day: September 15, 2018
American Tyler Vochim



SOUTHERN CALIFORNIA RADAR/LASER CERTIFICATION LABORATORY

P.O. Box 2397 Borrego Springs, CA 92004 619-922-3504

I certify that the Kustom Pro-Lite+, Serial Number LP03606 was tested on February 3, 2021, and was calibrated to be within the Manufacturers specifications for accuracy.

- · This unit meets or exceeds the NHTSA standards for accuracy.
- · This unit is on the IACP Conforming Product List.
- · This units tests meet the standard set forth in cvc 40802().

Test	Min	Max	Read	Pass
Visual/Function	-	-	Inspect	Yes
Range @ 100 ft.	5	+.5	100.0	100
Beam Width	-	.003	.0013	Yen
Acquisition Time @ 60MPH	8	:3Sec	.18Sec	YA25
35MPH	-2 MPH	+1MPH	35MPH	Ves
50MPH	-2 MPH	+1MPH	50MPH	Yes
65MPH	-2 MPH	+1MPH	65MPH	Yes
Pulse Width	-	<100nS	22.4nS	Sec.
PRF	200	200	200	YEB
Sight Accuracy	N/A	003	.001	Yes
Oscillator Frequency	19.9980 MHz	20.0020 MHz	19.999 MHz	Yes
Beam Power		175uW	151 uW	Yun
Total/7mm		26uW	15.5uW	

. The second se

and a data for manufacture a perificance and a solution of a statistic

I certify (or declare) under the penalty of perjury under the laws of the state of California that the foregoing is true and correct.

By: Date: February 3, 2021 William F. Dunable, MS/CIS, FCC Lic. # PG-11SD-2354

Serving Law Enforcement Since 1995 www.SoCalRadar-laserCertificationLab.com





SELF-ACCURACY TEST Kustom Signals Pro-Lite+ Lidar Speed Measurement Tool

DATE:	4/26/20	21	
Start of shift	"Self Diagnosti	ic test" time:	1:00 PM
Start of shift	Distance check	:100'	lidar
End of shift '	Self Diagnostic	e test" time:	2:30 PM
End of shift l	Distance check:	100'	
City and Sta	te:Kirkland	l, WA	
Lidar Serial	Number:	LP03	606
Certification	Date:	_February 3 rd ,	2021
OPERATOR	e c	harles Goodric	h

I, *Charles Goodrich*, certify that the Kustom Signals Pro-Lite+ Lidar speed measurement device was setup, tested, and operated in accordance with the manufactures specifications to include its self-diagnostic check.

Further, I certified that the self-check distance was completed and accurate.

Signature: Con Mar Date: 4/26/2021





American Traffic Solutions

Speed Validation Worksheet

Date			4/26/2021				
Time			2:15pm				
Site ID	Site ID			KRKF001			
Location Address			Kirkland, Washington NB 132nd Ave NE @ Muir Elementary/Kamiakin Middle				
							Posted Spee
Trigger Spee	ed Limit			26MPI	Н		
Speed Type			Fixe	d Speed/ So	chool Zone		
Lidar Technician			EA	Charles Go	odrich		
AutoPatrol Technician				Nathan Du	ımler		
Lidar Serial Number Radar Serial Number			LP03606				
			590-112 / 61344				
Detection Ty	pe		Autopatrol-Radar Yes Yes				
Measure Mo	de Captur	e					
Photo enfor	cement sig	ins present					
Pass/ Fail			Yes				
Ascending o	r Descend	ling	Descending				
		revised 06/04/15 SIT !	M.G. proprietary and	confidential			
City Lane	Times	Lidar Speeds	AP Speeds	Delta	Comments		
1	2.15.41	16	16	0			
1	2.15.43	15	15	0			
1	2.15.46	16	17	1			
1	2.15.51	15	14	-1			
1	2.16.06	28	28	0			





American Traffic Solutions

Speed Validation Worksheet

Date			4/26/2021			
Time			2:17pm			
Site ID				KRKF0	02	
Location			Kirkland, WA			
Address			SB 132nd Ave N	E @ Muir Elem	entary/Kamiakin Middle	
Posted Spee	ed Limit			20MP	Н	
Trigger Spee	ed Limit	MARK STREET		26MPI	H	
Speed Type			Fixe	d Speed/ Sc	chool Zone	
Lidar Technician				Charles Go	odrich	
AutoPatrol Technician				Nathan Du	ımler	
Lidar Serial Number Radar Serial Number			LP03606 590-112 / 65874			
Measure Mo	de Captur	e				
Photo enfor	cement sig	ins present				
Pass/ Fail			Yes			
Ascending o	r Descend	ling	Descending			
		revised 06/04/15 SIT M	M.G. proprietary and	confidential		
City Lane	Times	Lidar Speeds	AP Speeds	Delta	Comments	
1	2.17.48	20	20	0		
1	2.18.09	20	21	1		
1	2.18.43	18	18	0		
1	2.18.46	16	16	0		
1	2.19.23	19	19	0		





FILED MAY 2 4 2021 KIRKLAND MUNICIPAL COURT

Preventive Maintenance Checklist

Date: 04/26/2021	Time:	Site ID: KRKF001	Location: 132nd Ave NE @ Muir Elementary/Kamiakin Middl	ıtary/Kamiakin Middle		
Vendor: NSA		Technician Name: C	harles Goodrich	Escalate to ATS:		

The individual identified represents and warrants that he or she has personal knowledge of the information provided herein, that the information is true and correct as of the date set forth herein, and that the

information as set forth may be relied upon as a business record produced in the normal course of a regularly conducted business conducted business activity as a regular practice.

Item	Status	Note/Action
1.1 Clean dirt, grime, and graffiti off enclosure and clean glass.		
Clean Glass: If glass is cracked on the enclosure, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.	NA	
Clean graffiti: If cleaning is expected to take more than 15 minutes, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.	NA	
Clean Enclosure: If enclosure moves while cleaning glass, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.	NA	
1.2 Perform a general site inspection to include environmental and road conditions If fails, open a new repair ticket		
WVDs: check for any pucks popped out of the road or any visible cracks.	NA	
PLP/LL: check for exposed loop wire, cut loop wire, and wear and tear on epoxy.	NA	
1.3 Inspect poles, bases, enclosures. If any repair work is necessary that will take longer than 15 minutes to complete, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.		
Ensure pole is sturdy. Check hurricane collar and ensure screws are tight.	NA	
Ensure base does not have any cracks. Ensure bolts ae tight inside the base and also the latch bolt.	NA	
Ensure enclosure is well strapped to the pole and is not loose. Tighten if loose.	NA	
1.4 Inspect cables and connections. If any repair work is necessary, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.		
Check for any wear or damage.	NA	
Check for exposed wires on pole connecting to radar cables, camera enclosure, and strobe.	NA	





Clean enforcment sign



Pole close up



Clean enclosure







Γ

Preventive Maintenance Checklist

Time:	Site ID:

ite ID: KRKF002

Location: 132nd Ave NE @ Muir Elementary/Kamiakin Middle

Vendor: NSA

Date: 04/26/2021

Technician Name: Charles Goodrich

Escalate to ATS:

The individual identified represents and warrants that he or she has personal knowledge of the information provided herein, that the information is true and correct as of the date set forth herein, and that the


information as set forth may be relied upon as a business record produced in the normal course of a regularly conducted business conducted business activity as a regular practice.


Item	Status	Note/Action
1.1 Clean dirt, grime, and graffiti off enclosure and clean glass.		
Clean Glass: If glass is cracked on the enclosure, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.	NA	
Clean graffiti: If cleaning is expected to take more than 15 minutes, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.	NA	8
Clean Enclosure: If enclosure moves while cleaning glass, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.	NA	
1.2 Perform a general site inspection to include environmental and road conditions If fails, open a new repair ticket		
WVDs: check for any pucks popped out of the road or any visible cracks.	NA	
PLP/LL: check for exposed loop wire, cut loop wire, and wear and tear on epoxy.	NA	
1.3 Inspect poles, bases, enclosures. If any repair work is necessary that will take longer than 15 minutes to complete, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.		
Ensure pole is sturdy. Check hurricane collar and ensure screws are tight.	NA	
Ensure base does not have any cracks. Ensure bolts ae tight inside the base and also the latch bolt.	NA	
Ensure enclosure is well strapped to the pole and is not loose. Tighten if loose.	NA	
1.4 Inspect cables and connections. If any repair work is necessary, immediately stop work and contact your manager or the ATS Field Service Manager via phone call to report the issue.		
Check for any wear or damage.	NA	
Check for exposed wires on pole connecting to radar cables, camera enclosure, and strobe.	NA	

Pole at a distance



Clean enforcment sign





Pole close up



Clean enclosure



Previously Flom Test Lab EMI, EMC, RF Testing Experts Since 1963

System Verification Test Report

Prepared for: American Traffic Solutions

Model: RRS24F-ST3

Serial Number: 590-112 / 60129

Description: Radar Beam Characteristics

То

Jenoptik Multi-Radar System Verification Procedure Base Frequency Test

Date of Issue: 11/11/2020

On the behalf of the applicant:

American Traffic Solutions 1150 N Alma School Rd Mesa, AZ 85201

Prepared by Compliance Testing, LLC 1724 S. Nevada Way Mesa, Arizona 85204 (480) 926-3100 phone / (480) 926-3598 fax <u>www.compliancetesting.com</u> Project No: p20b0001

Todd Lasher Project Test Engineer FILED MAY 2 4 2021 KIRKLAND MUNICIPAL COURT

tol-free: (865,1311-3268 fax: (480,)926-3598

http://www.CompleinceTesting.com http://www.ceTesting.com

> THIS DOCUMENT IS MAINTAINED AS A PUBLIC RECORD IN ACCORDANCE WITH RCW 5.44

p20b0001-60129_System Verification_Rev 1.0



Previously Flom Test Lab EMI, EMC, RF Testing Experts Since 1963 Imp Frank ComplemeTerring com

not grante Terrar and Som

Test Results Summary Table

The frequency measurements performed by Compliance Testing, LLC and reported within this report demonstrate that the Jenoptik RRS24F-ST3 radar system has an accuracy of less than or equal to 0.62 mph in the range 6.21 mph to 62.14 mph and an accuracy of 0.62 mph to 1.86 mph in the range of 62.14 mph to 186.41 mph. This is equal to or better than +/- 1 mph accuracy up to 100 mph.

Test Frequency Set 1

Nominal Frequency (GHz)	uency Measured Frequency Amp (GHz) (d		Frequency Deviation (MHz)	Limit (MHz)	Results
$F_0 = 24.08$	24.07865	8.039	1.35 +/- 0.03	+/- 48.2	Pass
F ₁ = 24.08725	24.0858	8.688	1.45 +/- 0.03	+/- 48.2	Pass
F ₂ = 24.089	24.08765	9.675	1.35 +/- 0.03	+/- 48.2	Pass
F ₃ = 24.09	24.08865	9.936	1.35 +/- 0.03	+/- 48.2	Pass

Test Frequency Set 2

Nominal Frequency (GHz)	Measured Frequency (GHz)	Amplitude (dBm)	Frequency Deviation (MHz)	Limit (MHz)	Results
$F_0 = 24.12$	24.1183	7.53	1.7 +/- 0.03	+/- 48.2	Pass
F ₁ = 24.12725	24.12555	8.491	1.7 +/- 0.03	+/- 48.2	Pass
F ₂ = 24.129	24.12735	9.544	1.65 +/- 0.03	+/- 48.2	Pass
F ₃ = 24.13	24.12835	9.823	1.65 +/- 0.03	+/- 48.2	Pass

Test Frequency Set 3

Nominal Frequency (GHz)	Measured Frequency (GHz)	Amplitude (dBm)	Frequency Deviation (MHz)	Limit (MHz)	Results
$F_0 = 24.16$	24.1586	7.653	1.4 +/- 0.03	+/- 48.2	Pass
F ₁ = 24.16725	24.16585	8.694	1.4 +/- 0.03	+/- 48.2	Pass
F ₂ = 24.169	24.16765	9.954	1.35 +/- 0.03	+/- 48.2	Pass
F ₃ = 24.17	24.1687	9.984	1.3 +/- 0.03	+/- 48.2	Pass



Previously Flom Test Lab EMI, EMC, RF Testing Experts Since 1963

System Verification Test Report

Prepared for: American Traffic Solutions

Model: RRS24F-ST3 (-40 to +70)

Serial Number: 590-113 / 61399

Description: Radar Beam Characteristics

То

Jenoptik Multi-Radar System Verification Procedure Base Frequency Test

Date of Issue: 12/10/2020

On the behalf of the applicant:

American Traffic Solutions 1150 N Alma School Rd Mesa, AZ 85201

Prepared by Compliance Testing, LLC 1724 S. Nevada Way Mesa, Arizona 85204 (480) 926-3100 phone / (480) 926-3598 fax <u>www.compliancetesting.com</u> Project No: p20c0001

Todd Lasher Project Test Engineer

MAY 2 4 2021 KIKKLAND MUNICIPAL COURT

tol-free: (366.) 311-3268 fax: 1480 1526-3558

http://www.ComplainteTesting.com

mos grateTecnelqmo3&etne

THIS DOCUMENT IS MAINTAINED AS A PUBLIC RECORD IN ACCORDANCE WITH RCW 5.44

p20c0001-61399_System Verification_Rev 1.0



Previously Flom Test Lab EMI, EMC, RF Testing Experts Since 1963 http://www.ComplemeTeting.com

tol-tree: (8661311-3268 faxe [480] 926-3598

mos grittes Tesneliq mo Sentre

Test Results Summary Table

The frequency measurements performed by Compliance Testing, LLC and reported within this report demonstrate that the Jenoptik RRS24F-ST3 radar system has an accuracy of less than or equal to 0.62 mph in the range 6.21 mph to 62.14 mph and an accuracy of 0.62 mph to 1.86 mph in the range of 62.14 mph to 186.41 mph. This is equal to or better than +/- 1 mph accuracy up to 100 mph.

Test Frequency Set 1

Nominal Frequency (GHz)	Measured Frequency (GHz)	Amplitude (dBm)	Frequency Deviation (MHz)	Limit (MHz)	Results
$F_0 = 24.08$	24.07835	7.722	1.65 +/- 0.03	+/- 48.2	Pass
F ₁ = 24.08725	24.08560	8.409	1.65 +/- 0.03	+/- 48.2	Pass
F ₂ = 24.089	24.08730	9.619	1.70 +/- 0.03	+/- 48.2	Pass
F ₃ = 24.09	24.08835	9.867	1.65 +/- 0.03	+/- 48.2	Pass

Test Frequency Set 2

Nominal Frequency (GHz)	Measured Frequency (GHz)	Amplitude (dBm)	Frequency Deviation (MHz)	Limit (MHz)	Results
$F_0 = 24.12$	24.11840	8.129	1.60 +/- 0.03	+/- 48.2	Pass
F ₁ = 24.12725	24.12570	8.804	1.55 +/- 0.03	+/- 48.2	Pass
F ₂ = 24.129	24.12745	10.130	1.55 +/- 0.03	+/- 48.2	Pass
F ₃ = 24.13	24.12845	10.220	1.55 +/- 0.03	+/- 48.2	Pass

Test Frequency Set 3

Nominal Frequency (GHz)	Measured Frequency (GHz)	Amplitude (dBm)	Frequency Deviation (MHz)	Limit (MHz)	Results
F ₀ = 24.16	24.15860	7.891	1.40 +/- 0.03	+/- 48.2	Pass
F ₁ = 24.16725	24.16580	8.265	1.45 +/- 0.03	+/- 48.2	Pass
F ₂ = 24.169	24.16765	9.784	1.35 +/- 0.03	+/- 48.2	Pass
F ₃ = 24.17	24.16860	9.880	1.40 +/- 0.03	+/- 48.2	Pass