

4. 12. 2022


**SCALE:** 1" = 30'-0"





48



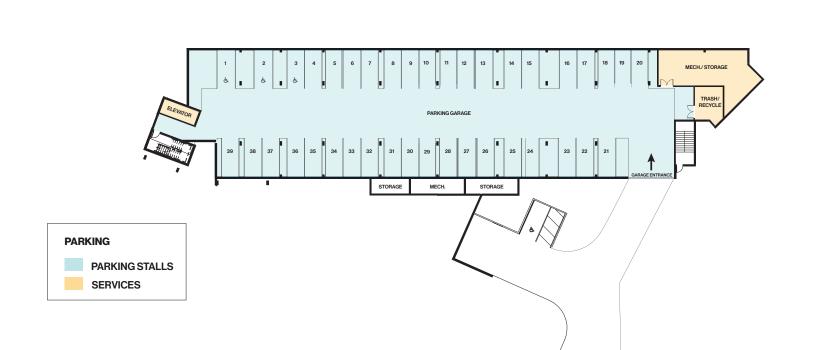



HOT WATER ELECT. MECH. LAUNDR 1 . н. L. া ব k Mы AFFORDABLE UNITS AFFORDABLE UNITS R R Q I VELE VEE UP 74 ŭ ι. I . Г . RESIDENTIAL PATIO FIRST FLOOR COMMUNITY SPACE UNITS SERVICES





49

4. 12. 2022

SCALE:

1" = 30'-0"

4. 12. 2022

**SCALE:** 1" = 30'-0"







ARDEA AT TOTEM LAKE | AFFORDABLE HOUSING TOD DEVELOPMENT | PREFERRED SCHEME - FLOOR PLANS - FLOORS 3-7

4. 12. 2022

**SCALE:** 1" = 30'-0"

1 de la K I **N** AFFORDABLE UNITS AFFORDABLE UNITS K. AFFORDABLE UNITS K K. ) BIG 

FLOORS 3-7 UNITS SERVICES



ARDEA AT TOTEM LAKE | AFFORDABLE HOUSING TOD DEVELOPMENT | SITE SECTION - WEST

229.4' MAX BUILDING HEIGHT PER IBC CONFIRM TO THE 08 ROOF TOP OF SHEATHING 229'-0" 229' - 3" MAX BUILDING HEIGHT Mi INI ini mi ini ilui THE 88 PERLANDUSE 07 SEVENTHELOOR 218'-0" 88 Mital int Mital int THE 06 SIXTH FLOOR 208'-2" mifimi ini mi ini ini TTT 05 FIFTH FLOOR 198'-4" 00 THE mitani illi ai ini illi F 04 FOURTH FLOOR 188'-6 a: 21181 :a: 21181 BB 03 THIRD FLOOR 178'-8" TTTTTT THE TH HIHH 02 SECONDELOOR 168'-10' 1 1 IBC GRADE PLAN 01FIRST ELOOR 0 159' - 5 1/32" KMC GRADE PLAN 154' - 4" 148'-6"

SITE SECTION - WEST

CITY OF KIRKLAND | DRB | CONCEPTUAL DESIGN CONFERENCE





SCALE: 1" = 30'-0" ARDEA AT TOTEM LAKE | AFFORDABLE HOUSING TOD DEVELOPMENT | SITE SECTION - EAST

4. 12. 2022

**SCALE:** 1" = 30'-0"



SITE SECTION - EAST



WATTENBARGER


WG

ARDEA AT TOTEM LAKE | AFFORDABLE HOUSING TOD DEVELOPMENT | SITE SECTION - NORTH

SCALE:

4. 12. 2022

1" = 30'-0"

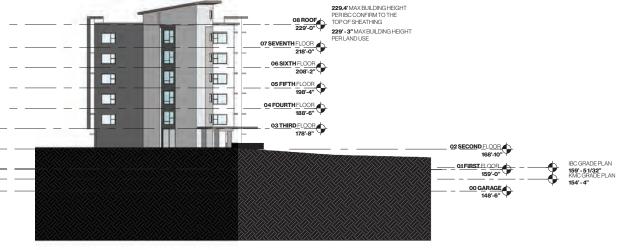






#### ARDEA AT TOTEM LAKE | AFFORDABLE HOUSING TOD DEVELOPMENT | SITE SECTION - SOUTH

4. 12. 2022

SCALE:

1" = 30'-0"

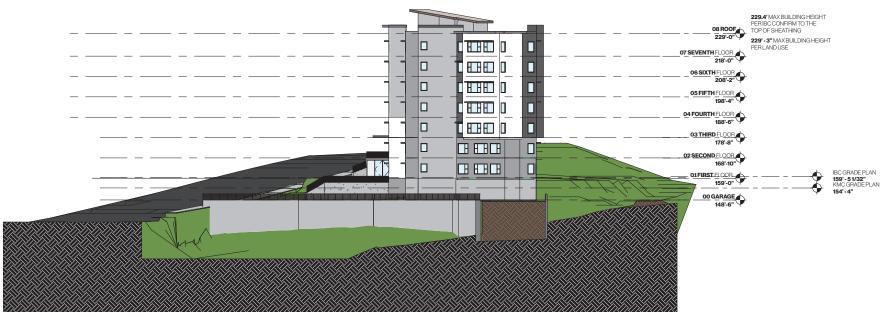

SITE SECTION - SOUTH

#### 55.41 User Guide - TL 6A and TL 6B zones.

The charts in KZC 55.45 contain the basic zoning regulations that apply in the TL 6A and TL 6B zones of the City. Use these charts by reading down the left hand column entitled Use. Once you locate the use in which you are interested, read across to find the regulations that apply to that use.

#### Section 55.43



Section 55.43 - GENERAL REGULATIONS

The following regulations apply to all uses in this zone unless otherwise noted:

1. Refer to Chapter <u>1</u> KZC to determine what other provisions of this code may apply to the subject property.

2. Where feasible, primary access for nonresidential uses within TL 6 shall be from 124th Avenue NE, NE 124th Street, or NE 120th Street.

3. The ground floor of all structures with frontage on a paved pedestrian or vehicular circulation route, or adjacent to a pedestrian-oriented space shall be a minimum of 13 feet in height (see Plate <u>34C</u>, Chapter <u>180</u> KZC). Where necessary for the ground floor of the building to be at the elevation of an abutting street, the building may exceed the permitted maximum <u>height of structure</u> by up to five feet. This requirement does not apply to:

a. The following uses: vehicle service stations, private lodges or clubs, stacked dwelling units, churches, schools, day-care centers, mini-schools or mini-day-care centers, assisted living facilities, convalescent centers or nursing homes, residential development in TL 6A where over 80 percent of the total units in the development are affordable to households earning no more than 60 percent of the King County median income, public utilities, government facilities or community facilities;

- b. Parking garages;
- c. Additions to existing nonconforming development where the Planning Official determines it is not feasible; or
- d. Parcels located more than 500 feet north of NE 124th Street, east of 116th Avenue NE.

4. Development shall provide publicly accessible space(s) at the primary pedestrian frontage that extends the public realm while creating a transition between public and private spaces. These public spaces shall have no dimension less than 15 feet. Developments with less than 25,000 square feet of gross floor area or fewer than 50 dwelling units shall provide publicly accessible space(s) ranging from 500 to 1,000 square feet. Larger developments shall provide publicly accessible space(s) ranging from 500 to 1,000 square feet. Larger developments shall provide publicly accessible space(s) ranging from 500 to 2,000 square feet in size. Through design review, the City will review the location, size and dimensions, features and improvements (such as multi-use paths, plazas, seating, public art and water features) proposed for the publicly accessible space(s) as part of the Design Review approval. The City may also require or permit modification to the required publicly accessible space as part of the Design Review approval.

5. In addition to the height exceptions established by KZC <u>115.60</u>, the following exceptions to height regulations in TL zones are established:

- a. Decorative parapets may exceed the height limit by a maximum of four feet; provided, that the average height of the parapet around the perimeter of the structure shall not exceed two feet.
- b. For structures with a peaked roof, the peak may extend eight feet above the height limit if the slope of the roof is equal to or greater than four feet vertical to 12 feet horizontal.

6. Access for drive-through facilities must be approved by the Public Works Official. See Chapter 105 KZC for requirements.

7. Some development standards or design regulations may be modified as part of the design review process. See Chapter 92 or 142 KZC for requirements.

(GENERAL REGULATIONS CONTINUED ON NEXT PAGE)

(GENERAL REGULATIONS CONTINUED FROM PREVIOUS PAGE)

In TL 6B, development must provide a grid of internal access roads (see Plate <u>34A</u>, Chapter <u>180</u> KZC) pursuant to the following standards:

 A centralized east-west connection that forms the spine for the site. Such a connection would reduce the need for vehicular circulation on NE 124th Street.

b. Two to three north-south connections from NE 124th Street to the east-west connection noted above. A desirable distance between access roads is between 250 and 300 feet. The maximum allowable distance between access roads shall be 350 feet. These may be public or private streets. Wider separation (up to 500 feet) may be considered where properties dedicate a minimum 30-foot-wide public pedestrian corridor.

- c. Suggested cross-sections for each of these roads:
  - Two travel lanes (one lane each way);
  - 2) On-street parallel parking:
  - 3) Eight- to 12-foot-wide sidewalks on each side of the street with street trees placed 30 feet on-center. Sidewalk width may be reduced where planting strips (minimum four feet wide) are maintained between the street and sidewalk.
  - The above access roads may be private or public.

9. The applicant shall install a <u>through-block pathway</u> or other pathways to link streets and/or activities (see Plate <u>14C</u>, Chapter <u>180</u> KZC). Include at least one mid-block east-west pathway connecting uses to 116th Avenue NE and a network of north-south pathways at intervals no greater than 350 feet that link uses to NE 124th Street. <u>Through-block pathways</u> may be integrated with internal access roads and/or provided within separate pedestrian-only corridors. See KZC <u>105.19</u> for <u>through-block pathway</u> standards. Additional <u>through-block</u> <u>pathways</u> not shown in the <u>Comprehensive Plan</u> may be required by the City on parcels larger than two acres in order to enhance pedestrian access on large sites.

10. No portion of a structure on the subject property within 40 feet of Slater Avenue in TL 6A may exceed 30 feet above the elevation of Slater Avenue as measured at the midpoint of the frontage of the subject property on Slater Avenue.

link to Section 55.45 table

## The Kirkland Zoning Code is current through Ordinance 4781, passed February 1, 2022.

Disclaimer: The City Clerk's Office has the official version of the Kirkland Zoning Code. Users should contact the City Clerk's Office for ordinances passed subsequent to the ordinance cited above. City Website: https://www.kirklandwa.gov/ (https://www.kirklandwa.gov/) City Telephone: (425) 587-3000 Code Publishing Company (https://www.codepublishing.com/) eLibrary (https://www.codebook.com/listing/)



	<i>(</i> 0					D	IRECTIO	NS: FIRST, read dow	vn to fin	d use	THEN, acros	s for REGULATIONS
55.45	ŝNOI			MINIM	IUMS		l	MAXIMUMS				
Section 55		Required Review Process	Lot Size	REQUIRED YARD (See Ch. 115)		Lot Coverage	Height of Structure	Landscape Category (See Ch. 95)	Sign Category (See Ch. 100)	Required Parking Spaces (See Ch. 105)	Special Regulations (See also General Regulations)	
.010	Station	D.R., Chapter 142 KZC	22,500 sq. ft.	40'	15' on each side	15'	80%	35' above average building elevation.	A	E	See KZC 105.25.	<ol> <li>May not be more than two vehicle service stations at any intersection.</li> <li>Gas pump islands may extend 20 feet into the front yard. Canopies or covers over gas pump islands may not be closer than 10</li> </ol>
					bec. Reg							feet to any property line. Outdoor parking and service areas may not be closer than 10 feet to any property line. See KZC 115.105, Outdoor Use, Activity and Storage, for further regulations.
.020	A Retail Establishment providing vehicle or boat sales or vehicle or boat service or repair. See Spec. Reg. 3.		None	10'	0'	0'		45' above average building elevation. See Gen. Regs. 3 and 10.				<ol> <li>This use is not permitted in the TL 6B zone.</li> <li>Outdoor vehicle or boat parking or storage areas must be buffered as required for a parking area in KZC 95.45. See KZC 115.105, Outdoor Use, Activity and Storage, for additional regulations.</li> <li>Vehicle and boat rental and used vehicles or boat sales are allowed as part of this use.</li> </ol>
.030	Restaurant or Tavern								В		1 per each 100 sq. ft. of gross floor area.	<ol> <li>For restaurants with drive-in or drive-through facilities:         <ul> <li>a. One outdoor waste receptacle shall be provided for every eight parking stalls.</li> <li>b. Access for drive-through facilities shall be approved by the Public Works Department. Drive-through facilities shall be designed so that vehicles will not block traffic in the right-of-way while waiting in line to be served.</li> </ul> </li> </ol>
.050	Any Retail Estab- lishment, other than those specifi- cally listed in this zone, selling goods or providing services, includ- ing banking and related financial services								С		1 per each 300 sq. ft. of gross floor area.	<ol> <li>Ancillary assembly and manufacture of goods on the premises of this use are permitted only if:         <ul> <li>The assembled or manufactured goods are directly related to and are dependent upon this use, and are available for pur- chase and removal from the premises.</li> <li>The outward appearance and impacts of this use with ancillary assembly or manufacturing activities must be no different from other retail uses.</li> </ul> </li> <li>Retail establishments providing storage services are not permitted in this zone unless accessory to another permitted use.</li> </ol>



Zone TL 6A, 6B

						D	IRECTIO	NS: FIRST, read dow	n to fin	d use	THEN, acros	ss for REGULATIONS
55.45	SNOI		MINIMUMS									
Section 55		Required Review Process	Lot Size	• •			Coverage	Height of Structure	Landscape Category (See Ch. 95)	n Category se Ch. 100)	Required Parking Spaces	Special Regulations
S	⇒			Front	Side	Rear	Lot	Structure	S, C, C,	Sig (Sé	Spaces (See Ch. 105)	(See also General Regulations)
.060	Office Use	D.R., Chapter 142 KZC	None	10'	0,	0'	80%	65' above average building elevation. See Gen. Regs. 3 and 10.	С		If a medical, dental or veteri- nary office, then 1 per each 200 sq. ft. of gross floor area. Otherwise, 1 per each 300 sq. ft. of gross floor area.	b. Outside runs and other outside facilities for the animals are not
.070	Hotel or Motel									E	1 per each room. See also Spec. Reg. 2.	<ol> <li>May include ancillary meeting and convention facilities.</li> <li>Excludes parking requirements for ancillary meeting and convention facilities. Additional parking requirement for these ancillary uses shall be determined on a case-by-case basis.</li> </ol>
.080	Entertainment, Cultural and/or Recreational Facility										See KZC 105.25.	
.090	Private Lodge or Club							45' above average building elevation. See Gen. Reg. 10.			1 per each 300 sq. ft. of gross floor area.	



		<i>(</i> 0					D	RECTIO	NS: FIRST, read dow	n to fin	d use	THEN, acros	s for REGULATIONS
55.45		SNOI		MINIMUMS				Γ					
Section 55		REGULATIONS	Required Review Process	Lot Size	. ,			Coverage	Height of Structure	Landscape Category (See Ch. 95)	Sign Category (See Ch. 100)	Required Parking Spaces	Special Regulations
0		₽			Front	Side	Rear	Lot	Olidetare	S, C	Sig (Se	Spaces (See Ch. 105)	(See also General Regulations)
.100	Units.	d or Dwelling ec. Reg. 1.	D.R., Chapter 142 KZC	None	10'	0'	0'	80%	75' above average building elevation. See Gen. Regs. 3 and 10.	D	A	1.2 per studio unit. 1.3 per 1 bedroom unit. 1.6 per 2 bedroom unit. 1.8 per 3 or more bedroom unit. See KZC 105.20 for visitor parking requirements.	<ol> <li>The street level floor of the building shall include commercial use. The commercial use shall be oriented toward fronting streets, major pedestrian sidewalks and through-block pathways, and have a minimum depth of 20 feet and an average depth of at least 30 feet (as measured from the face of the building along the street, major pedestrian sidewalk or through-block pathway). Lobbies for this use are allowed within the commercial frontage provided they do not exceed 20 percent of the building's linear commercial frontage along the street. The Design Review Board may determine the orientation of the commercial use where multiple pedestrian circulation routes exist (see Plate 34C).</li> <li>The Design Review Board may approve a minor reduction in the depth requirements if the applicant demonstrates that the require- ment is not feasible given the configuration of existing or proposed improvements and that the design of the commercial frontage will maximize visual interest.</li> <li>This requirement does not apply to ground floor residential use in TL 6A where over 80 percent of the total units in the development are affordable to households earning no more than 60 percent of King County median income, adjusted for household size.</li> <li>At least 10 percent of the units provided in new residential devel- opments of four units or greater shall be affordable housing units, as defined in Chapter 5 KZC. See Chapter 112 KZC for additional affordable housing requirements and incentives.</li> <li>Chapter 115 KZC contains regulations regarding home occupa- tions and other accessory uses, facilities and activities associated with this use.</li> </ol>

# Section 55.45



	S						D	IRECTIO	NS: FIRST, read dow	n to fin	d use	THEN, acros	s for REGULATIONS
45		SNO			MINIM	UMS		I	MAXIMUMS				
Section 55.45			Required Review Process	Lot Size		REQUIRED YARD (See Ch. 115)		Lot Coverage	Height of Structure	Landscape Category (See Ch. 95)	Sign Category (See Ch. 100)	Required Parking Spaces	Special Regulations
0		⇒			Front	Side	Rear	Lot (	onderare	S, L	Sig (Se	(See Ch. 105)	(See also General Regulations)
.105			D.R., Chapter 142 KZC	None	10'	0,	0'	80%	75' above average building elevation. See Gen. Regs. 3 and 10.	D	A	See Spec. Reg. 2.	<ol> <li>The street level floor of the building shall include commercial use. The commercial use shall be oriented toward fronting streets, major pedestrian sidewalks and through-block pathways, and have a minimum depth of 20 feet and an average depth of at least 30 feet (as measured from the face of the building along the street, major pedestrian sidewalk or through-block pathway). Lobbies for this use are allowed within the commercial frontage, provided they do not exceed 20 percent of the building's linear commercial frontage along the street. The Design Review Board may determine the orientation of the commercial use where multiple pedestrian circulation routes exist (see Plate 34C).</li> <li>The Design Review Board may approve a minor reduction in the depth requirements if the applicant demonstrates that the require- ment is not feasible given the configuration of existing or proposed improvements and that the design of the commercial frontage will maximize visual interest.</li> <li>Parking shall be provided at a rate of one stall per living unit plus one per on-site employee, and modifications to decrease the park- ing requirement are prohibited. However, if parking is managed pursuant to Special Regulation 3, parking shall be provided at a rate of 0.5 per living unit plus one per on-site employee.</li> <li>The required parking shall be 0.5 per living unit where the parking is managed as follows and the property owner agrees to the follow- ing in a form approved by the City and recorded with King County: a. Rentals shall be managed such that the total demand for park- king does not exceed the available supply of required private parking. If the demand for private parking equals or exceeds the supply of required private parking, the property owner shall either restrict occupancy of living units or restrict leasing to only tenants who do not have cars.</li> <li>The property owner shall prepare a Transportation Manage- ment Plan (TMP) for review and approval by the City and recording with</li></ol>



	(0					D	IRECTIO	NS: FIRST, read dov	vn to fin	d use	THEN, acros	s for REGULATIONS
55.45	SNOI.			MINIM	IUMS		I		>-			
Section 55	А Т REGULATIONS	Required Review Process	Lot Size	· · /			Coverage	Height of	Landscape Category (See Ch. 95)	n Category e Ch. 100)	Required Parking Spaces	Special Regulations
S				Front	Side	Rear	Lot C	Structure	ی دی <sup>ر</sup>	Sign (See	Spaces (See Ch. 105)	(See also General Regulations)
.105	Residential Suites (continued)											<ul> <li>REGULATIONS CONTINUED FROM PREVIOUS PAGE</li> <li>3) Lease provisions and monitoring requirements for the property owner to ensure that tenants are not parking off site to avoid parking charges.</li> <li>4) Adequate secured and sheltered bicycle parking to meet anticipated demand.</li> <li>5) Designation of a Transportation Coordinator to manage the TMP, provide commute information to all new tenants, and be a point of contact for the City.</li> <li>6) At the time the project attains 90 percent occupancy, the property owner shall provide an accurate and detailed report of initial resident parking demand and alternative commute travel. The report format shall be reviewed and approved by the City.</li> <li>7) Following the initial survey, the property owner shall submit a biennial survey of residents prepared and conducted by a licensed transportation engineer or other qualified professional documenting on-site and potential off-site parking utilization and alternative commute travel. The Planning Director may increase or decrease the frequency of the survey based on the documented success of the TMP.</li> <li>REGULATIONS FOR THIS USE CONTINUED ON THE NEXT PAGE</li> </ul>



		(0					D	IRECTIO	NS: FIRST, read dov	vn to fin	d use	THEN, acros	ss for REGULATIONS
55.45		SNOL			MINI	NUMS		I	MAXIMUMS		> -		
Section 55		REGULATIONS	Required Review Process	Lot Size			ອ ອ ອ ວ ວ ບ Structure		Landscape Category (See Ch. 95)	in Categori ee Ch. 100)	Required Parking Spaces (See Ch. 105)	Special Regulations	
0		⇒			Fron	t Side	Rear	Lot (	ondotare	<u></u> з°с	Sig (Si	(See Ch. 105)	(See also General Regulations)
.105	Residen (continue	tial Suites ed)											<ul> <li>REGULATIONS CONTINUED FROM PREVIOUS PAGE</li> <li>8) Acknowledgment by the property owner that it shall be a violation of this code for the actual parking demand for the project to exceed the available supply of required parking or to fail to comply with the provisions of the TMP or reporting requirements.</li> <li>c. After one year of project occupancy, the Planning Official may allow a decrease in the required number of spaces if the number of spaces proposed is documented by an adequate and thorough parking demand and utilization study of the property. The study shall be prepared by a licensed transportation engineer or other qualified professional, and shall analyze the operational characteristics of the use which justify a parking reduction. The scope of the study shall be proposed by the transportation engineer and approved by the City Transportation Engineer. The study shall provide at least two days of data for morning, afternoon and evening hours, or as otherwise approved or required by the City Transportation Engineer.</li> <li>4. All residential suites and all required parking within a project shall be under common ownership and management.</li> <li>5. Development shall be designed, built and certified to achieve or exceed one or more of the following green building standards: Built Green 5 Star certified, LEED Gold certified, or Living Building Challenge certified.</li> <li>6. Developments containing this use shall provide common living area available to all residential suite residents. Common living area shall consist of areas such as barred kitchens, dining areas, and community rooms. Areas such as bathrooms, laundries, utility rooms, storage, stairwells, mailrooms, and hallways shall not be counted as common living area. The minimum amount of common living area for each project shall be 250 square feet plus an additional 20 square feet per living unit.</li> </ul>



Zone TL 6A, 6B

	(0					D	IRECTIO	NS: FIRST, read dov	vn to fin	d use	THEN, acros	ss for REGULATIONS
55.45	SNOI			MINIM	UMS							
Section 55		Required Review Process	Lot Size		REQUIRED YARD (See Ch. 115)		Lot Coverage	Height of Structure	Landscape Category (See Ch. 95)	In Category ee Ch. 100)	Required Parking Spaces	Special Regulations
0)	⇒			Front	Side	Rear	Lot (	ondotare		Sign ( See	Spaces (See Ch. 105)	(See also General Regulations)
.110	Wholesale Trade See Spec. Reg. 1. Packaging of Prepared Materials Wholesale Printing or Publishing Industrial Laundry Facility	D.R., Chapter 142 KZC	None	20'	0'	0,	80%	35' above average building elevation. See Gen. Reg. 3.	A	С	1 per each 1,000 sq. ft. of gross floor area.	<ol> <li>This use is only allowed on property in TL 6A.</li> <li>May include, as part of this use, accessory retail sales or service.</li> <li>The building housing the use shall have been in existence on December 31, 2005, and shall not be altered, changed, or otherwise modified to accommodate the use if the cost of such alteration, change, or modification exceeds 30 percent of the replacement cost of that building.</li> <li>The use must be discontinued when there is an alteration, change, or other work in a consecutive 12-month period to the space in which the use is located, and the cost of the alteration, change or other work exceeds 30 percent of the replacement cost of that space.</li> </ol>
.120	Church			10'	5' on each side	10'		45' above average building elevation. See Gen. Reg. 10.	C		1 for every 4 people based on maximum occupancy load of any area of worship. See also Spec. Reg. 2.	<ol> <li>May include accessory living facilities for staff persons.</li> <li>No parking is required for day-care or school ancillary to this use.</li> </ol>
.130	School, Day-Care Center, Mini- School or Mini- Day-Care Center				0'	0'			D		See KZC 105.25.	<ol> <li>A six-foot high fence is required only along the property lines adjacent to the outside play areas.</li> <li>Hours of operation may be limited to reduce impacts on nearby residential uses.</li> <li>An on-site passenger loading area must be provided. The City shall determine the appropriate size of the loading areas on a case-by-case basis, depending on the number of attendees and the extent of the abutting right-of-way improvements. Carpooling, staggered loading/unloading time, right-of-way improvements or other means may be required to reduce traffic impacts on nearby residential uses.</li> <li>May include accessory living facilities for staff persons.</li> <li>The location of parking and passenger loading areas shall be designed to reduce impacts on nearby residential uses.</li> </ol>



						D	IRECTIO	NS: FIRST, read dov	vn to fin	d use	THEN, acros	s for REGULATIONS
55.45	ATIONS			MINIM	UMS		MAXIMUMS					
Section 55		Required Review Process	iew Lot			Coverage	Height of	Landscape Category (See Ch. 95)	n Category e Ch. 100)	Required Parking	Special Regulations	
Ň	° ₽			Front	Side	Rear	Lot C	Structure	S, C <sup>L</sup>	Sigı (Se	Spaces (See Ch. 105)	(See also General Regulations)
.140	Assisted Living Facility Convalescent Center Nursing Home	D.R., Chapter 142 KZC	None	10'	0'	0'	80%	45' above average building elevation. See Gen. Reg. 10.	D		Assisted Liv- ing: 1.7 per independent unit. 1 per assisted living unit. Convalescent Center or Nurs- ing Home: 1 per bed.	<ol> <li>A facility that provides both independent dwelling units and assisted living units shall be processed as an assisted living facil- ity.</li> <li>Development must include commercial use on the ground floor with gross floor area equal to or greater than 20 percent of the area of the subject property. Minor floor area reductions may be approved by the Planning Official if the applicant demonstrates that meeting the requirement is not feasible given the configura- tion of existing or proposed improvements and that the commer- cial space is configured to maximize its visibility and pedestrian orientation.</li> <li>Chapter 115 KZC contains regulations regarding home occupa- tions and other accessory uses, facilities, and activities associated with this use.</li> </ol>
	Public Utility								A		See KZC 105.25.	<ol> <li>Landscape Category A or B may be required depending on the type of use on the subject property and the impacts associated</li> </ol>
.160	Government Facility Community Facility								C See Spec. Reg. 1.			with the use on the nearby uses.
.170		Development process.	standaro	ds will be	e determ	nined on	a case-by-	case basis. See Chapt	er 49 KZC	C for ree	quired review	