


TYPICAL CROSS SECTION

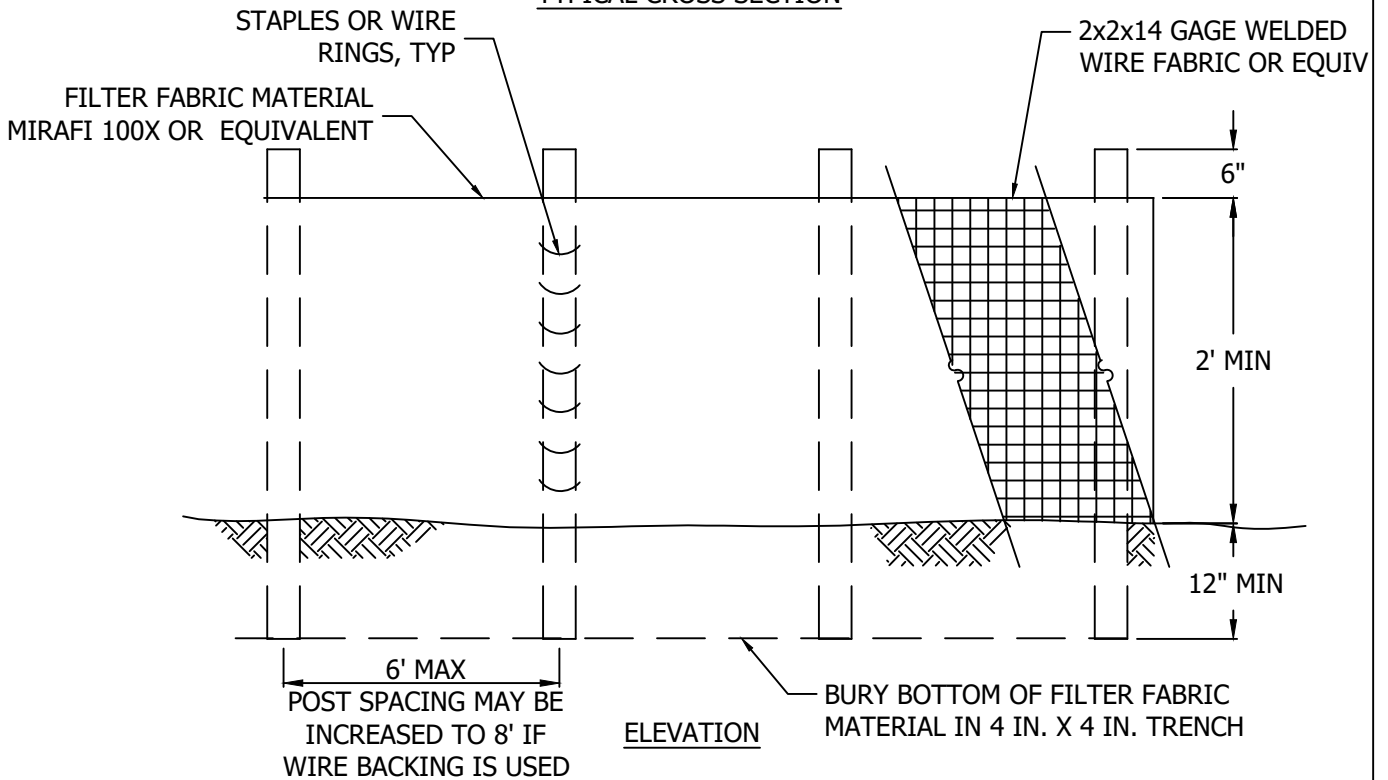

NOTES

1. PREFAB FENCE ALLOWED IF REINFORCED AND APPROVED BY CITY INSPECTOR.
2. FENCE SHALL NOT BE INSTALLED ON SLOPES STEEPER THAN 2:1.
3. JOINTS IN FILTER FABRIC SHALL BE SPLICED AT POSTS. USE STAPLES, WIRE RINGS, OR EQUIVALENT TO ATTACH FABRIC TO POSTS AND FENCE.
4. REMOVE SEDIMENT WHEN IT REACHES 1/3 FENCE HEIGHT.
5. LOCATION OF FENCING SHALL BE AS SHOWN ON APPROVED PLANS OR AS DIRECTED BY THE CITY.
6. MAXIMUM 100' SHEET OR OVERLAND FLOW PATH LENGTH TO SILT FENCE.
7. DO NOT DIRECT FLOWS GREATER THAN 0.5 CFS TO FENCE.
8. SILT FENCE SHOULD NOT BE INSTALLED IN STREAMS OR V-SHAPED DITCHES.
9. FILTER FABRIC SHOULD BE INSTALLED ALONG CONTOURS WHENEVER POSSIBLE.

CITY OF KIRKLAND

PLAN NO. CK - E.03



SILT FENCE