


SLOPE SURFACE SHALL BE SMOOTH BEFORE
PLACEMENT FOR PROPER SOIL CONTACT
STAPLING PATTERN AS PER
MANUFACTURER'S RECOMMENDATIONS

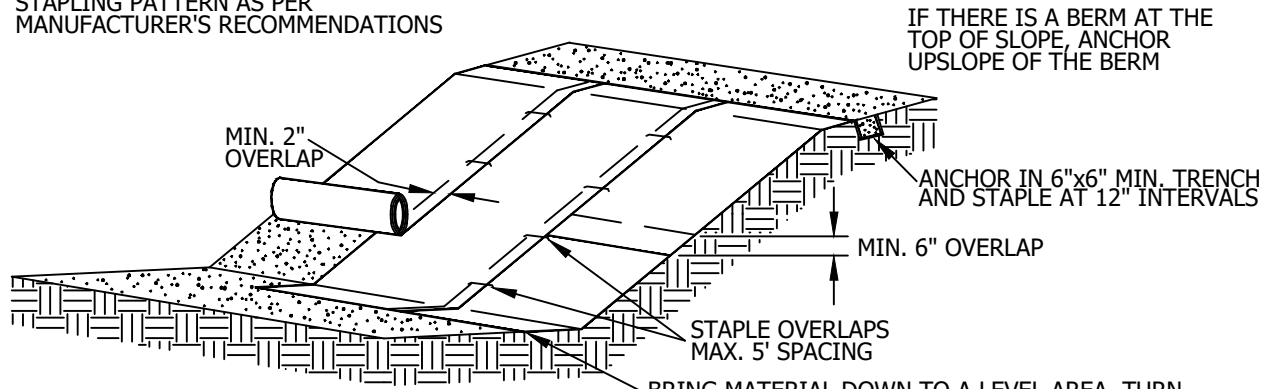

IF THERE IS A BERM AT THE
TOP OF SLOPE, ANCHOR
UPSLOPE OF THE BERM

ANCHOR IN 6"x6" MIN. TRENCH
AND STAPLE AT 12" INTERVALS

MIN. 6" OVERLAP

STAPLE OVERLAPS
MAX. 5' SPACING

BRING MATERIAL DOWN TO A LEVEL AREA, TURN
THE END UNDER 4" AND STAPLE AT 12" INTERVALS

DO NOT STRETCH BLANKETS/MATTINGS TIGHT -
ALLOW THE ROLLS TO MOLD TO ANY IRREGULARITIES

FOR SLOPES LESS THAN 3H:1V, ROLLS
MAY BE PLACED IN HORIZONTAL STRIPS

LIME, FERTILIZE AND SEED BEFORE INSTALLATION.
PLANTING OF SHRUBS, TREES, ETC. SHOULD OCCUR
AFTER INSTALLATION.

NET & BLANKET INSTALLATION

NOT TO SCALE

NOTES:

1. IF BLANKET IS NOT LONG ENOUGH TO COVER THE ENTIRE SLOPE LENGTH, THE TRAILING EDGE OF THE UPPER BLANKET SHOULD OVERLAP THE LEADING EDGE OF THE LOWER BLANKET AND BE STAPLED.
2. MULCH IS REQUIRED FOR NETS, AND NOT REQUIRED FOR BLANKETS.
3. USE 100% BIODEGRADABLE BLANKETS IN SENSITIVE AREAS.
4. MAINTAIN GOOD CONTACT WITH THE GROUND. EROSION MUST NOT OCCUR BENEATH THE BLANKET.
5. INSPECT NETS AND BLANKETS AFTER EACH SIGNIFICANT STORM; MAINTAIN AND REPAIR PROMPTLY.

TEMPORARY STABILIZATION NOTES:

1. STRAW, WOOD FIBER CELLULOSE, COMPOST, AND CHIPPED SITE VEGETATION USED FOR TEMPORARY STABILIZATION SHALL BE PLACED AT A MINIMUM 2" THICK ACROSS THE AREA TO BE STABILIZED.
2. HYDRAULIC MATRICES SHALL BE APPLIED PER MANUFACTURER'S RECOMMENDATION.
3. SEE TABLE D.2.1.2.A IN THE 2021 KING COUNTY SURFACE WATER DESIGN MANUAL FOR MORE DETAIL.

CITY OF KIRKLAND

PLAN NO. CK - E.06



**NETS, BLANKETS,
TEMP. STABILIZATION**