


PLAN

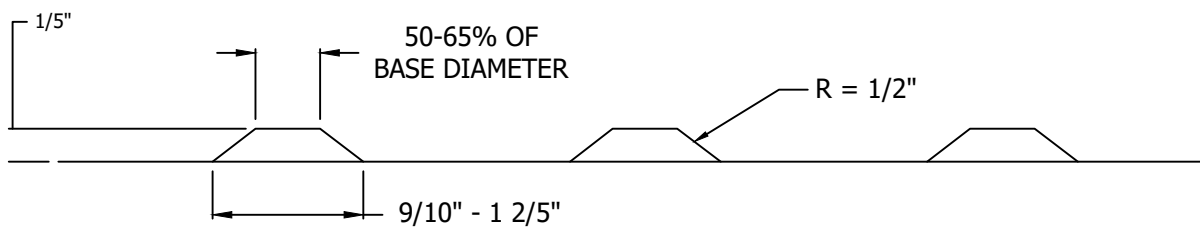

ELEVATION

NOTE:

1. THE DETECTABLE WARNING PATTERN SHALL BE FORMED BY ADDING A MANUFACTURED MATERIAL BEFORE THE CONCRETE HAS CURED.
2. THE TWO-FOOT WIDE DETECTABLE WARNING PATTERN AREA ON THE RAMP SHALL BE YELLOW AND SHALL MATCH THE COLOR OF "STANDARD INTERSTATE YELLOW" PAINT AS SPECIFIED IN FORMULA K-2-83.
3. EMBOSSING THE WET CONCRETE OR INSTALLING MASONRY OF CERAMIC TILES MUST BE APPROVED BY CITY ENGINEER.

CITY OF KIRKLAND

PLAN NO. CK - R.25B



**TRUNCATED DOME
TEXTILE WARNING
SURFACE**