




PLAN




PLAN

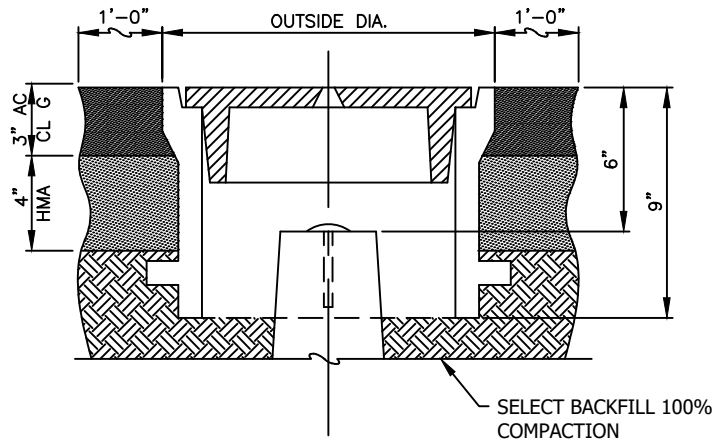

ELEVATION

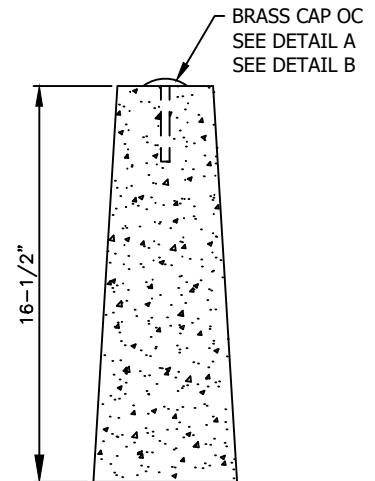

ELEVATION



CAP DETAIL
CAP LAYOUT FOR
ALL PROJECTS

NOTES:

1. ALL JOINTS BETWEEN ASPHALT PATCH AND EXISTING PAVEMENT SHALL BE SEALED.
2. THE CASTINGS SHALL BE GREY-IRON CASTINGS, ASTM DESIGNATION A-48, CLASS 30B. THE COVER AND SEAT SHALL BE MACHINED SO AS TO HAVE PERFECT CONTACT AROUND THE ENTIRE CIRCUMFERENCE AND FULL WIDTH OF BEARING SURFACE.
3. CONCRETE COLLAR REQUIRED IF OUTSIDE OF ASPHALT AREA.
4. HMA MUST BE COMPACTED WITH PROCTOR HAMMER (PNEUMATIC BACKFILL COMPACTION TAMPER) IN 3" LIFTS

CITY OF KIRKLAND

PLAN NO. CK-R.03



MONUMENT
CASE AND COVER