
LAST REVISED: 01/2025



- 1. SIZE OF PLANTING PIT SHALL BE 4' BY 6' BY 3' DEEP.
- 2. FOR DECIDUOUS TREES, 2" CALIPER MINIMUM AND BRANCHING STARTS 5' ABOVE GRADE (UNLESS OTHER APPROVED BY CITY.)
- FOR PLANTING DISTANCES NEAR INTERSECTIONS AND DRIVEWAYS, REFER TO PRE-APPROVED PLANS NOTEBOOK.
- 4. TREES SHALL NOT BE PLANTED WITHIN 10' OF ANY UG UTILITY ACCESS WHICH MAY BE LOCATED IN THE PLANTER STRIP OR ADJACENT SIDEWALK.
- 5. STAKE ONLY WHEN NECESSARY OR IF REQUIRED BY THE CITY AND INCLUDE TIMELINE FOR REMOVAL OF STAKES AND TIES.
- 6. ROOT BARRIER TO BE FLEXIBLE MESH MATERIAL. JASON MILLS STYLE 899 NYLON APPROVED WITH EXTRA FIRM FINISH. MINIMUM 12" OVERLAP SECURED WITH LANDSCAPE STAPLES. SHALL BE CONTINUOUS AROUND BED PERIMETER AND SHALL EXTEND 5' ON EITHER SIDE OF TRUNK. SEE PRE-APPROVED PLANS: SOIL PREPARATION FOR TREE PLANTING.
- 7. SPECIAL CONSTRUCTION NOTE FOR FILTERRA TREE BOXES: AT THE TIME OF PLANTING, IN ADDITION TO FILTERRA MANUFACTURER SPECS., TREES MUST BE A MIN. 51 INCHES TALL ABOVE THE TREE GRATE SURFACE AND 0.75 INCH DIAM. AT THE GRATE OPENING. THE TREE SHOULD MEASURE AT LEAST 5.25 FT FROM THE ROOT COLLAR OF THE TREE.

CITY OF KIRKLAND

PLAN NO. CK-R.48

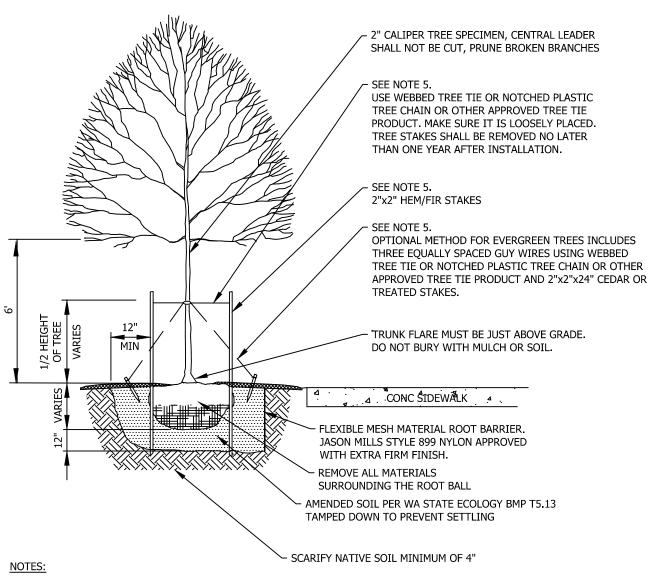

TREE PLANTING DETAIL